



Device circuit breaker 1-pole with auxiliary switch NO contact Characteristic F1
16A 230 V AC 50/60 Hz 60 V DC Icn 3 kA AC according to IEC 60934

| Model | |
|---|--------------------------------------|
| product brand name | SENTRON |
| product designation | Device protection switch |
| General technical data | |
| number of poles | 1 |
| design of pole | 1P+AS |
| tripping characteristic class | F1 |
| mechanical service life (operating cycles) typical | 6 000 |
| overvoltage category | 3 |
| degree of pollution | 2 |
| Voltage | |
| type of voltage of the operating voltage | AC/DC |
| insulation voltage (Ui) | |
| • at DC rated value | 72 V |
| • with single-phase operation at AC rated value | 250 V |
| • operational current | |
| — at 40 °C rated value | 14.67 A |
| — at 50 °C rated value | 13.82 A |
| — at 55 °C rated value | 13.38 A |
| — at 60 °C rated value | 12.93 A |
| • operational current at AC rated value | 16 A |
| Supply voltage | |
| supply voltage | |
| • at AC | 230 V |
| • at DC rated value | 60 V |
| value range of the supply voltage frequency | 50/60 Hz |
| operating voltage at DC rated value maximum | 72 V |
| Protection class | |
| protection class IP | IP20 |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 3.07 W |
| suitability for operation | Residential buildings/infrastructure |
| Product details | |
| product feature touch protection | Yes |
| product component | |
| • combined terminal top | No |
| • combined terminal bottom | No |

| | |
|---|-----|
| • neutral conductor switching | No |
| product feature properties for main switches in accordance with EN 60204-1 | Yes |
| product feature halogen-free | Yes |
| product feature sealable | Yes |
| product feature silicon-free | Yes |
| product extension installable supplementary devices | Yes |

Connections

| | |
|---|---------------------|
| connectable conductor cross-section solid | |
| • minimum | 0.5 mm ² |
| • maximum | 16 mm ² |
| connectable conductor cross-section stranded | |
| • minimum | 0.5 mm ² |
| • maximum | 16 mm ² |
| connectable conductor cross-section finely stranded with core end processing | |
| • minimum | 0.5 mm ² |
| • maximum | 10 mm ² |
| AWG number as coded connectable conductor cross section | |
| • minimum | 20 |
| • maximum | 6 |
| tightening torque [lbf·in] with screw-type terminals | |
| • minimum | 17.7 lbf·in |
| tightening torque with screw-type terminals | |
| • minimum | 2 N·m |
| • maximum | 2.5 N·m |
| position of power supply cord | Any |

Mechanical Design

| | |
|--------------------------------------|---------------------|
| height | 90 mm |
| width | 18 mm |
| depth | 76 mm |
| installation depth | 70 mm |
| number of modular width units | 1 |
| fastening method | DIN rail |
| mounting position | Horizontal/vertical |
| Net Weight | 123 g |

Environmental conditions

| | |
|--|-------------------------------|
| influence of the surrounding temperature | 30 °C @ 85%rF; 60 °C @ 20%rF" |
| standard | IEC / DIN EN 60934, UL1077 |
| vibration resistance according to IEC 60068-2-6 | Yes |
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 60 °C |
| ambient temperature during storage | |
| • minimum | -40 °C |
| • maximum | 70 °C |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 6 |

Approvals Certificates

| | |
|--------------------|---------------------------------|
| Environment | General Product Approval |
|--------------------|---------------------------------|

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



| | | |
|---------------------------------|--------------------------|--------------|
| General Product Approval | Test Certificates | other |
|---------------------------------|--------------------------|--------------|

Railway

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SY1716-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SY1716-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY1716-2

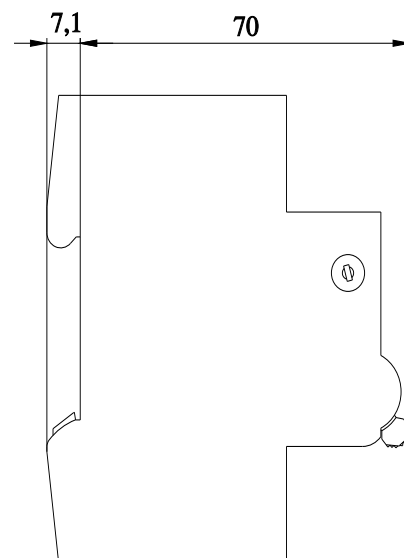
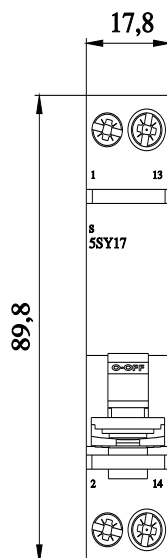
CAx-Online-Generator

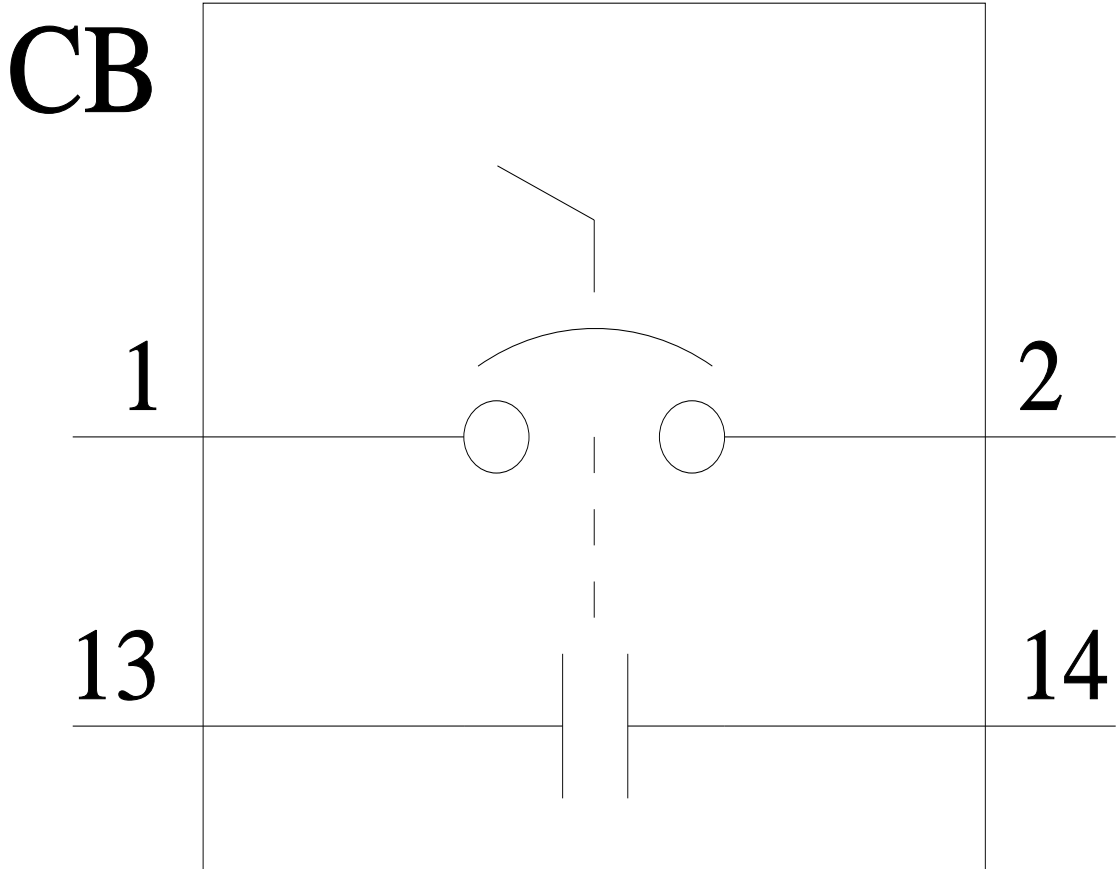
<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)




last modified:

5/26/2026

