

Article No. : 6SL3310-1GH37-4AA3

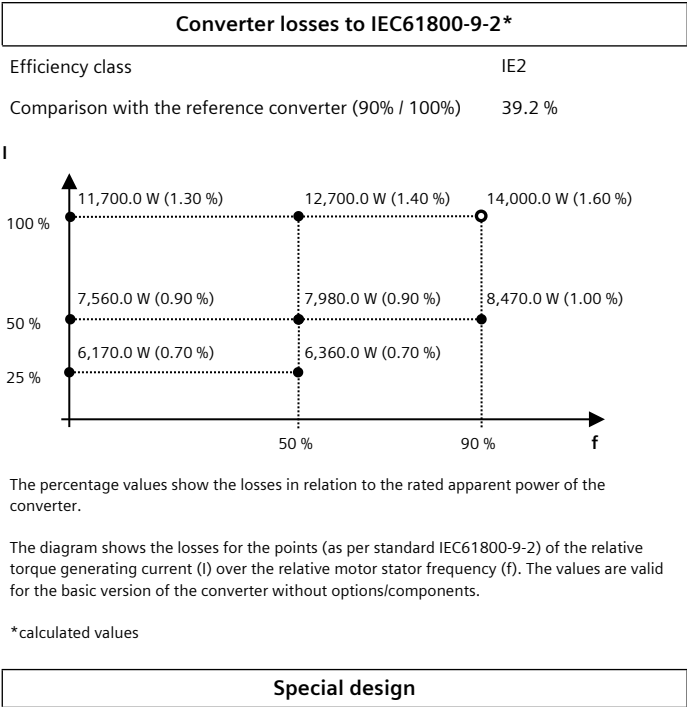


Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		
Input		
Supply frequency	47...63 Hz	
Supply voltage	690 V ±10 %	
Rated input current	764 A	
Max. current	1,164 A	
Pulse number	6	
Energy recovery capability	No	(2Q)
Output		
Output voltage	690 V	
Rated power (LO) in kW	710 kW	
Rated power (HO) in kW	560 kW	
Rated output current	735 A	
Rated output current (LO)	710 A	
Rated output current (HO)	657 A	
Output current Max	1,065 A	
Pulse frequency (factory setting)	1.25 kHz	
Basic data		
Power losses ΔP	14 kW	
Sound pressure level L _{pA} (1 m)	73 dB	
Conductor cross section, max. (IEC)	4 x 240 mm ²	
Degree of protection	IP00	
Dimensions (H x W x D)	1,510 mm x 909 mm x 540 mm	
Weight approx.	530 kg	
Frame size	JX	
Environmental conditions		
Installation altitude	1,000 m	
Coolant	Air	
Coolant requirement, air	1.48 m³/s	
Ambient temperature	0 °C - +40 °C	



Special design
Line-side power components
Load-side power components
DC link components
Supplementary system components
6SL30401GA011AA0 - Control Unit Kit CU320-2 PN (PROFINET, EtherNet/IP)