



overload relay 17...22 A thermal for motor protection frame size S0, class 10 for mounting onto contactors main circuit: screw auxiliary circuit: screw manual-automatic-reset multi-unit packaging pack = 16 units



General technical data	
Substance Prohibance (Date)	10/01/2009
Net Weight	0.13 kg
Installation/ mounting/ dimensions	
mounting position	for mounting on contactors: with a vertical mounting plane +/-135° rotatable & +/- 22.5° tiltable, stand-alone installation: with a vertical mounting plane +/-135° rotatable and +/-45° tiltable; for more details see manual


Approvals Certificates	
General Product Approval	For use in hazardous locations



Test Certificates	Maritime application	other
Special Test Certificate Type Test Certificates/Test Report		Confirmation Miscellaneous
other	Railway	Environment
	Special Test Certificate	Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4CB0-Z W97 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4CB0-Z W97 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4CB0-Z W97&lang=en

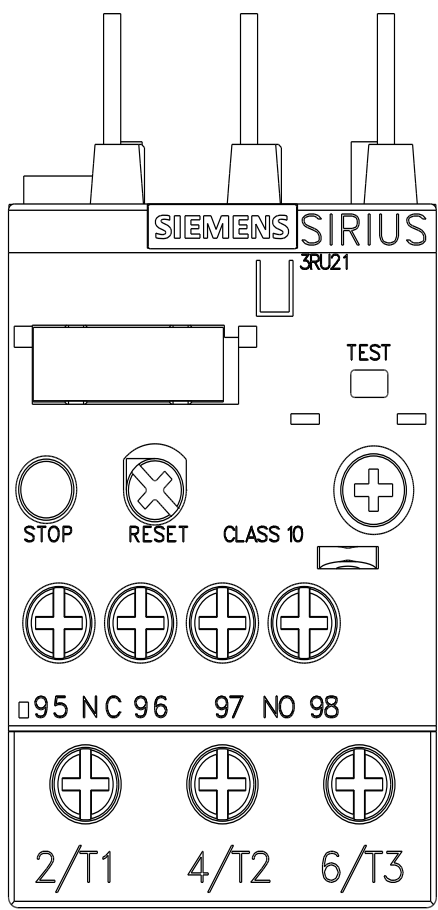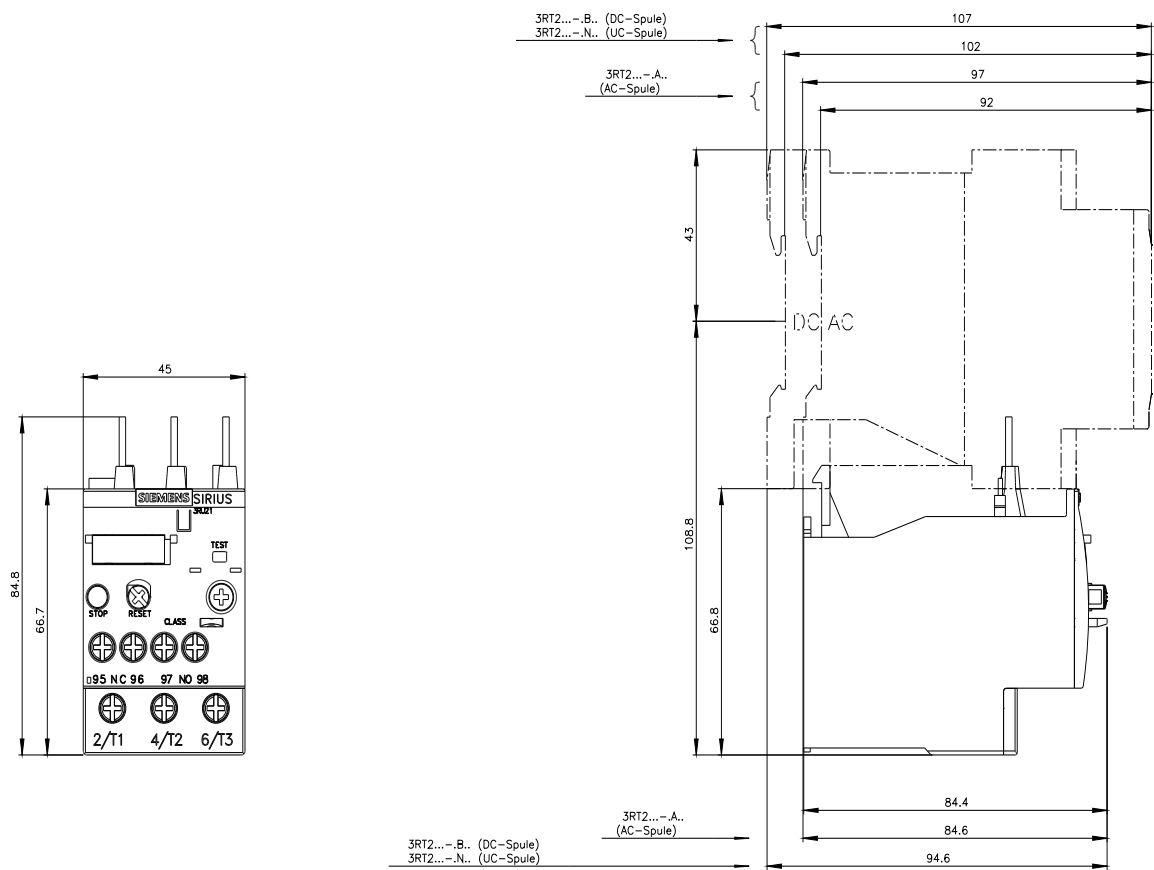

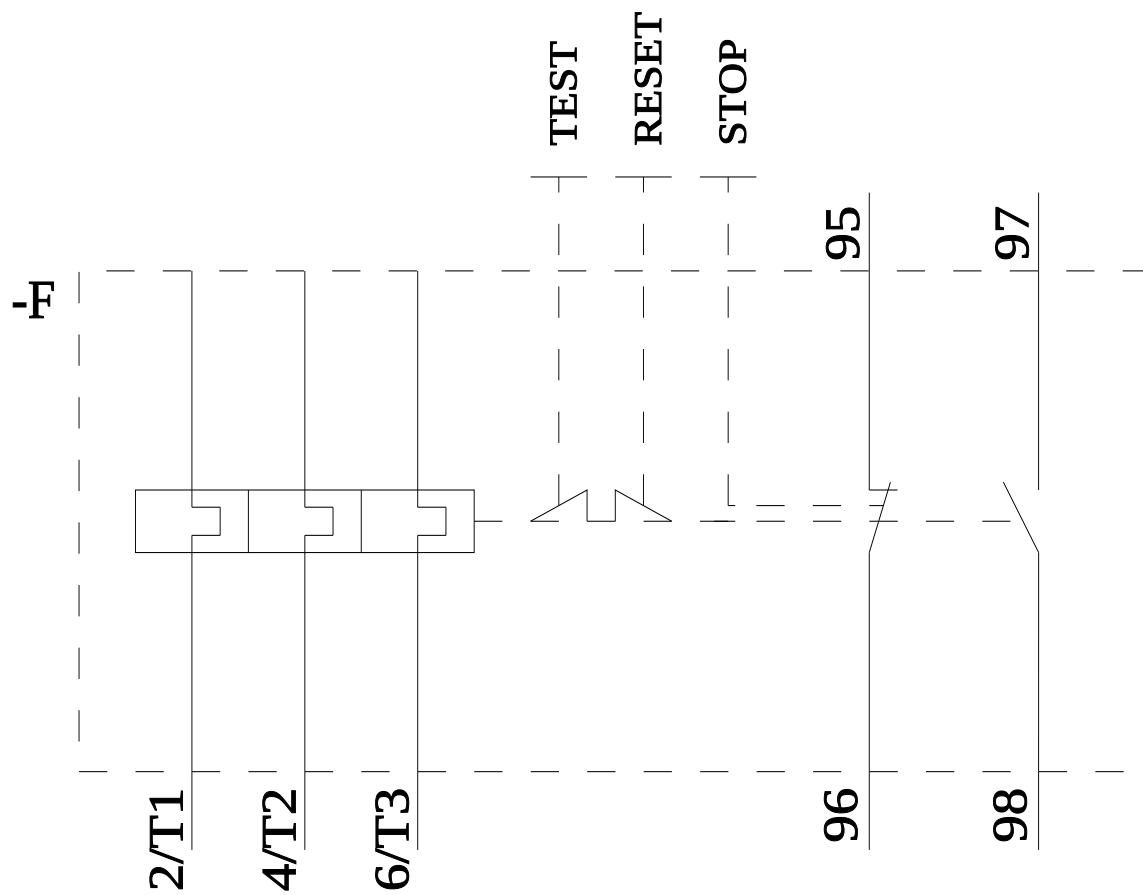

last modified:

6/1/2025 