

Overload relay 1.8...2.5 A Thermal For motor protection Size S0, Class 10
 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-
 Reset Reusable packaging Pack = 56 units

| | |
|--|------------------------|
| product brand name | SIRIUS |
| product designation | thermal overload relay |
| product type designation | 3RU2 |
| General technical data | |
| size of overload relay | S0 |
| size of contactor can be combined company-specific | S0 |
| power loss [W] for rated value of the current at AC in hot operating state | 5.7 W |
| • per pole | 1.9 W |
| type of calculation of power loss current-dependent | quadratic |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation | |
| • in networks with ungrounded star point between auxiliary and auxiliary circuit | 440 V |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 440 V |
| • in networks with ungrounded star point between main and auxiliary circuit | 440 V |
| • in networks with grounded star point between main and auxiliary circuit | 440 V |
| shock resistance according to IEC 60068-2-27 | 8g / 11 ms |
| reference code according to IEC 81346-2 | F |
| Substance Prohibitance (day/month/year) | 10/01/2009 |
| SVHC substance name | Lead CAS-No. 7439-92-1 |
| Net Weight | 0.16 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -40 ... +70 °C |
| • during storage | -55 ... +80 °C |
| • during transport | -55 ... +80 °C |
| temperature compensation | -40 ... +60 °C |
| relative humidity during operation | 10 ... 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 1.8 ... 2.5 A |
| operating voltage | |
| • rated value | 690 V |
| • at AC-3e rated value maximum | 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 2.5 A |
| operational current at AC-3e at 400 V rated value | 2.5 A |
| operating power | |
| • at AC-3 | |
| — at 400 V rated value | 0.75 kW |
| — at 500 V rated value | 1.1 kW |
| — at 690 V rated value | 1.5 kW |
| • at AC-3e | |

| | |
|------------------------|---------|
| — at 400 V rated value | 0.75 kW |
| — at 500 V rated value | 1.1 kW |
| — at 690 V rated value | 1.5 kW |

Auxiliary circuit

| | |
|---|-----------------------------|
| design of the auxiliary switch | integrated |
| number of NC contacts for auxiliary contacts | 1 |
| • note | for contactor disconnection |
| number of NO contacts for auxiliary contacts | 1 |
| • note | for message "Tripped" |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | |
| • at 24 V | 3 A |
| • at 110 V | 3 A |
| • at 120 V | 3 A |
| • at 125 V | 3 A |
| • at 230 V | 2 A |
| • at 400 V | 1 A |
| • at 690 V | 0.75 A |
| operational current of auxiliary contacts at DC-13 | |
| • at 24 V | 2 A |
| • at 60 V | 0.3 A |
| • at 110 V | 0.22 A |
| • at 125 V | 0.22 A |
| • at 220 V | 0.11 A |
| contact rating of auxiliary contacts according to UL | B600 / R300 |

Protective and monitoring functions

| | |
|---------------------------------------|----------|
| trip class | CLASS 10 |
| design of the overload release | thermal |

UL/CSA ratings

| | |
|---|-------|
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 2.5 A |
| • at 600 V rated value | 2.5 A |

Short-circuit protection

| | |
|---|---------------------------|
| design of the fuse link | |
| • for short-circuit protection of the auxiliary switch required | fuse gG: 6 A, quick: 10 A |

Installation/ mounting/ dimensions

| | |
|--------------------------|--|
| mounting position | for mounting on contactors: with a vertical mounting plane +/-135° rotatable & +/- 22.5° tiltable, stand-alone installation: with a vertical mounting plane +/-135° rotatable and +/-45° tiltable; for more details see manual |
| fastening method | Contactors mounting |
| height | 85 mm |
| width | 45 mm |
| depth | 85 mm |

Connections/ Terminals

| | |
|---|---|
| product component removable terminal for auxiliary and control circuit | No |
| type of electrical connection | |
| • for main current circuit | screw-type terminals |
| • for auxiliary and control circuit | screw-type terminals |
| arrangement of electrical connectors for main current circuit | Top and bottom |
| type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid or stranded | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) |
| — finely stranded with core end processing | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² |
| • for AWG cables for main contacts | 2x (16 ... 12), 2x (14 ... 8) |
| type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — solid or stranded | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| — finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |

| | |
|--|--------------------------------|
| <ul style="list-style-type: none"> for AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |
| tightening torque | |
| <ul style="list-style-type: none"> for main contacts with screw-type terminals | 2 ... 2.5 N·m |
| <ul style="list-style-type: none"> for auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| design of screwdriver shaft | Diameter 5 ... 6 mm |
| size of the screwdriver tip | Pozidriv PZ 2 |
| design of the thread of the connection screw | |
| <ul style="list-style-type: none"> for main contacts | M4 |
| <ul style="list-style-type: none"> of the auxiliary and control contacts | M3 |

Safety related data

| | |
|--|--------|
| failure rate [FIT] with low demand rate according to SN 31920 | 50 FIT |
|--|--------|

| | |
|-----------------------------------|---------|
| MTTF with high demand rate | 2 280 a |
|-----------------------------------|---------|

IEC 61508

| | |
|--|------|
| T1 value | |
| <ul style="list-style-type: none"> for proof test interval or service life according to IEC 61508 | 20 a |

Electrical Safety

| | |
|--|------|
| protection class IP on the front according to IEC 60529 | IP20 |
|--|------|

| | |
|---|--|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|---|--|

Display

| | |
|--------------------------------------|--------------|
| display version for switching status | Slide switch |
|--------------------------------------|--------------|

Approvals Certificates

| | | |
|--------------------|---------------------------------|---------------------------------------|
| Environment | General Product Approval | For use in hazardous locations |
|--------------------|---------------------------------|---------------------------------------|

[Environmental Confirmations](#)



| | | | |
|---------------------------------------|--------------------------|-----------------------------|--------------|
| For use in hazardous locations | Test Certificates | Maritime application | other |
|---------------------------------------|--------------------------|-----------------------------|--------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

| | |
|--------------|----------------|
| other | Railway |
|--------------|----------------|

[Miscellaneous](#)



[Special Test Certificate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-1CB0-Z X95>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1CB0-Z X95>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-1CB0-Z X95&lang=en


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-1CB0-Z X95>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

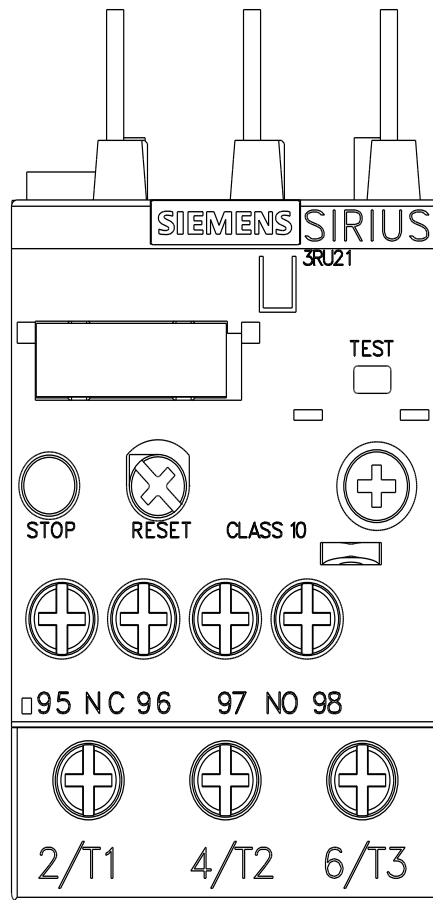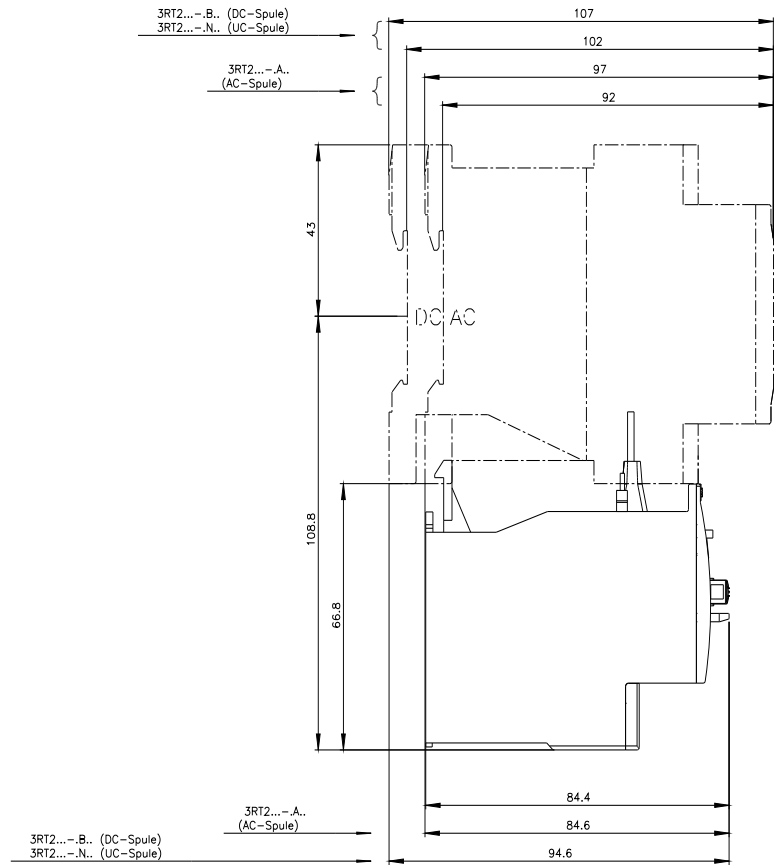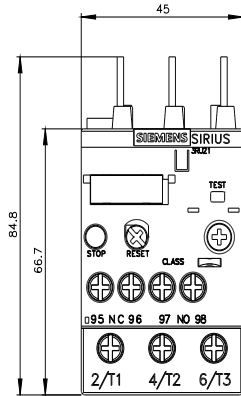

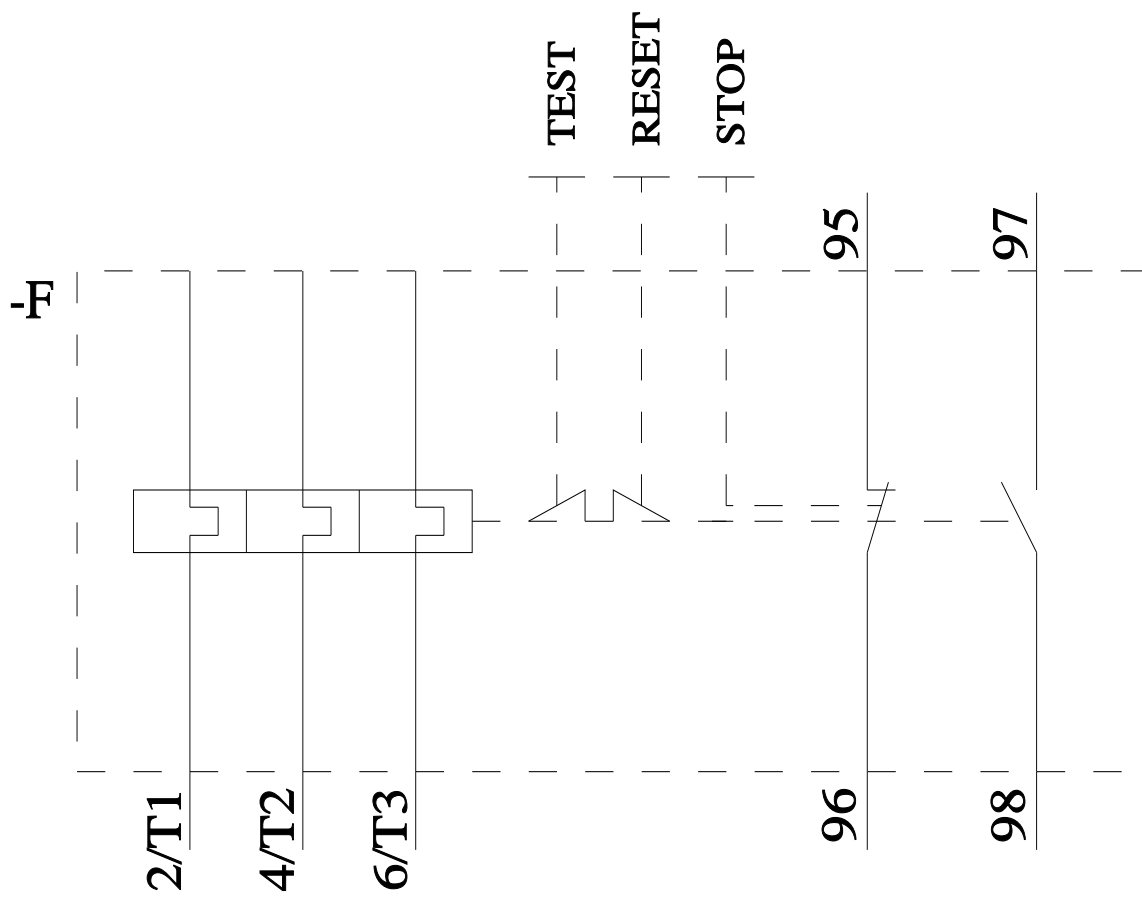

last modified:

4/21/2026 