



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 21-33 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NC, screw terminal, size: S2, F-PLC-IN

| | |
|--|--|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT2 |
| General technical data | |
| size of contactor | S2 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 6.6 W |
| • at AC in hot operating state per pole | 2.2 W |
| • without load current share typical | 1.6 W |
| type of calculation of power loss current-dependent | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 690 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| • of main circuit rated value | 6 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V |
| shock resistance at rectangular impulse | |
| • at AC | 7.7 g / 5 ms, 4.5 g / 10 ms |
| • at DC | 7.7 g / 5 ms, 4.5 g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 12 g / 5 ms, 7 g / 10 ms |
| • at DC | 12 g / 5 ms, 7 g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 5 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 5 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (day/month/year) | 01/29/2021 |
| SVHC substance name | Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 |
| Net Weight | 1.118 kg |
| Ambient conditions | |

| | |
|--|--------------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| number of NC contacts for main contacts | 0 |
| operating voltage | |
| • at AC-3 rated value maximum | 690 V |
| • at AC-3e rated value maximum | 690 V |
| operational current | |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value | 60 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 60 A |
| — up to 690 V at ambient temperature 60 °C rated value | 55 A |
| • at AC-3 | |
| — at 400 V rated value | 41 A |
| — at 500 V rated value | 41 A |
| — at 690 V rated value | 24 A |
| • at AC-3e | |
| — at 400 V rated value | 41 A |
| — at 500 V rated value | 41 A |
| — at 690 V rated value | 24 A |
| • at AC-4 at 400 V rated value | 35 A |
| • at AC-5a up to 690 V rated value | 52.8 A |
| • at AC-5b up to 400 V rated value | 33.2 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 36.5 A |
| — up to 400 V for current peak value n=20 rated value | 36.5 A |
| — up to 500 V for current peak value n=20 rated value | 36.5 A |
| — up to 690 V for current peak value n=20 rated value | 24 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 24.2 A |
| — up to 400 V for current peak value n=30 rated value | 24.2 A |
| — up to 500 V for current peak value n=30 rated value | 24.2 A |
| — up to 690 V for current peak value n=30 rated value | 24 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 16 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 22 A |
| • at 690 V rated value | 18.5 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 23 A |
| — at 110 V rated value | 4.5 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.4 A |
| — at 600 V rated value | 0.25 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 45 A |
| — at 110 V rated value | 45 A |

| | |
|--|--|
| <ul style="list-style-type: none"> — at 220 V rated value — at 440 V rated value — at 600 V rated value | 5 A 1 A 0.8 A |
| <ul style="list-style-type: none"> ● with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 55 A 55 A 55 A 45 A 2.9 A 1.4 A |
| <ul style="list-style-type: none"> ● at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 35 A 6 A 1 A 0.1 A 0.06 A |
| <ul style="list-style-type: none"> ● with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 55 A 45 A 25 A 5 A 0.27 A 0.16 A |
| <ul style="list-style-type: none"> ● with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 55 A 55 A 55 A 25 A 0.6 A 0.35 A |
| operating power <ul style="list-style-type: none"> ● at AC-2 at 400 V rated value ● at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value ● at AC-3e <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | 18.5 kW 11 kW 18.5 kW 22 kW 22 kW 11 kW 18.5 kW 22 kW 22 kW |
| operating power for approx. 200000 operating cycles at AC-4 <ul style="list-style-type: none"> ● at 400 V rated value ● at 690 V rated value | 11.6 kW 16.8 kW |
| operating apparent power at AC-6a <ul style="list-style-type: none"> ● up to 400 V for current peak value n=20 rated value ● up to 500 V for current peak value n=20 rated value ● up to 690 V for current peak value n=20 rated value | 25.2 kVA 31.6 kVA 28.6 kVA |
| operating apparent power at AC-6a <ul style="list-style-type: none"> ● up to 230 V for current peak value n=30 rated value ● up to 400 V for current peak value n=30 rated value ● up to 500 V for current peak value n=30 rated value ● up to 690 V for current peak value n=30 rated value | 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA |
| short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> ● limited to 1 s switching at zero current maximum ● limited to 5 s switching at zero current maximum | 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value |

| | |
|--|---|
| <ul style="list-style-type: none"> • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum | 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| <ul style="list-style-type: none"> • at AC • at DC | 1 000 1/h 1 000 1/h |
| operating frequency | |
| <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3e <ul style="list-style-type: none"> — maximum • at AC-4 maximum | 1 000 1/h 750 1/h 1 000 1/h 1 000 1/h 300 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 21 ... 33 V 21 ... 33 V |
| control supply voltage at DC rated value | 21 ... 33 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.8 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 ... 1.1 0.8 ... 1.1 |
| type of PLC-control input according to IEC 60947-1 | Type 1 |
| consumed current at PLC-control input according to IEC 60947-1 maximum | 11 mA |
| voltage at PLC-control input rated value | 24 V |
| operating range factor of the voltage at PLC-control input | 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| inrush current peak | 2.2 A |
| duration of inrush current peak | 100 µs |
| pickup current mean value | 1.6 A |
| pickup current peak | 2.6 A |
| duration of pickup current | 230 ms |
| holding current mean value | 0.075 A |
| apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 40 VA 40 VA |
| apparent holding power | |
| <ul style="list-style-type: none"> • at minimum rated control supply voltage at DC • at maximum rated control supply voltage at DC | 2 VA 2 VA |
| apparent holding power | |
| <ul style="list-style-type: none"> • at minimum rated control supply voltage at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz • at maximum rated control supply voltage at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz | 2 VA 2 VA 2 VA 2 VA |
| apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 2 VA 2 VA |
| inductive power factor with the holding power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.95 0.95 |
| closing power of magnet coil at DC | 40 W |
| holding power of magnet coil at DC | 1.6 W |

| | |
|---|---|
| closing delay | |
| • at AC | 35 ... 110 ms |
| • at DC | 35 ... 110 ms |
| opening delay | |
| • at AC | 30 ... 55 ms |
| • at DC | 30 ... 55 ms |
| recovery time after power failure typical | 2.1 s |
| arcing time | 10 ... 20 ms |
| control version of the switch operating mechanism | Fail-safe PLC input (F-PLC-IN) |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts instantaneous contact | 0 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 10 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| • at 220 V rated value | 1 A |
| • at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| • at 220 V rated value | 0.3 A |
| • at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 40 A |
| • at 600 V rated value | 41 A |
| yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 3 hp |
| — at 230 V rated value | 7.5 hp |
| • for 3-phase AC motor | |
| — at 200/208 V rated value | 10 hp |
| — at 220/230 V rated value | 15 hp |
| — at 460/480 V rated value | 30 hp |
| — at 575/600 V rated value | 40 hp |
| contact rating of auxiliary contacts according to UL | A600 / P600 |
| Short-circuit protection | |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA |
| design of the fuse link | |
| • for short-circuit protection of the main circuit | |
| — with type of coordination 1 required | gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) |
| — with type of coordination 2 required | gG: 80 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 63 A (415 V, 80 kA) |
| • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |

Installation/ mounting/ dimensions

| | |
|--|--|
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method side-by-side mounting | Yes |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| height | 114 mm |
| width | 55 mm |
| depth | 130 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 10 mm — upwards 10 mm — downwards 10 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 10 mm — upwards 10 mm — at the side 6 mm — downwards 10 mm • for live parts <ul style="list-style-type: none"> — forwards 10 mm — upwards 10 mm — downwards 10 mm — at the side 6 mm | |

Connections/ Terminals

| | |
|---|-----------|
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • at contactor for auxiliary contacts Screw-type terminals • of magnet coil Screw-type terminals | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid or stranded 2x (1 ... 35 mm²), 1x (1 ... 50 mm²) — finely stranded with core end processing 2x (1 ... 25 mm²), 1x (1 ... 35 mm²) • for AWG cables for main contacts 2x (18 ... 2), 1x (18 ... 1) | |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • finely stranded with core end processing 1 ... 35 mm² | |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> • solid or stranded 0.5 ... 2.5 mm² • finely stranded with core end processing 0.5 ... 2.5 mm² | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid or stranded 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) — finely stranded with core end processing 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) • for AWG cables for auxiliary contacts 2x (20 ... 16), 2x (18 ... 14) | |
| AWG number as coded connectable conductor cross section for main contacts | 18 ... 1 |
| AWG number as coded connectable conductor cross section for auxiliary contacts | 20 ... 14 |

Safety related data

| | |
|--|----------|
| product function | |
| <ul style="list-style-type: none"> • mirror contact according to IEC 60947-4-1 Yes • positively driven operation according to IEC 60947-5-1 No • suitable for safety function Yes | |
| suitability for use safety-related switching OFF | Yes |
| safe state | off |
| test wear-related service life necessary | Yes |
| diagnostics test interval by internal test function maximum | 28 800 s |
| stop category according to IEC 60204-1 | 0 |
| proportion of dangerous failures | |

| | |
|--|--|
| • with low demand rate according to SN 31920 | 40 % |
| • with high demand rate according to SN 31920 | 73 % |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT |
| MTBF | 52 a |
| IEC 62061 | |
| Safety Integrity Level (SIL) according to IEC 62061 | SIL 2 |
| PFHD with high demand rate according to IEC 62061 | 7.7E-8 1/h |
| ISO 13849 | |
| performance level (PL) according to ISO 13849-1 | PL c |
| category according to ISO 13849-1 | 2 |
| device type according to ISO 13849-1 | 1 |
| overdimensioning according to ISO 13849-2 necessary | Yes |
| IEC 61508 | |
| Safety Integrity Level (SIL) according to IEC 61508 | 2 |
| safety device type according to IEC 61508-2 | Type B |
| PFHD with high demand rate according to IEC 61508 | 7.7E-8 1/h |
| PFDAvg with low demand rate according to IEC 61508 | 0.0067 |
| Safe failure fraction (SFF) | 96 % |
| hardware fault tolerance according to IEC 61508 | 0 |
| T1 value of service life according to IEC 61508 | 20 a |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |

Approvals Certificates

| | |
|--------------------|---------------------------------|
| Environment | General Product Approval |
|--------------------|---------------------------------|

[Environmental Con-
firmations](#)



| | | | | |
|---------------------------------|------------|--------------------------|--------------------------|-----------------------------|
| General Product Approval | EMV | Functional Safety | Test Certificates | Maritime application |
|---------------------------------|------------|--------------------------|--------------------------|-----------------------------|



[Type Examination Cer-
tificate](#)

[Type Test Certific-
ates/Test Report](#)



| | |
|-----------------------------|--------------|
| Maritime application | other |
|-----------------------------|--------------|



[Miscellaneous](#)

[Confirmation](#)

| | |
|--------------|----------------|
| other | Railway |
|--------------|----------------|



[Special Test Certific-
ate](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-1SB30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-1SB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2035-1SB30&lang=en


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2035-1SB30>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

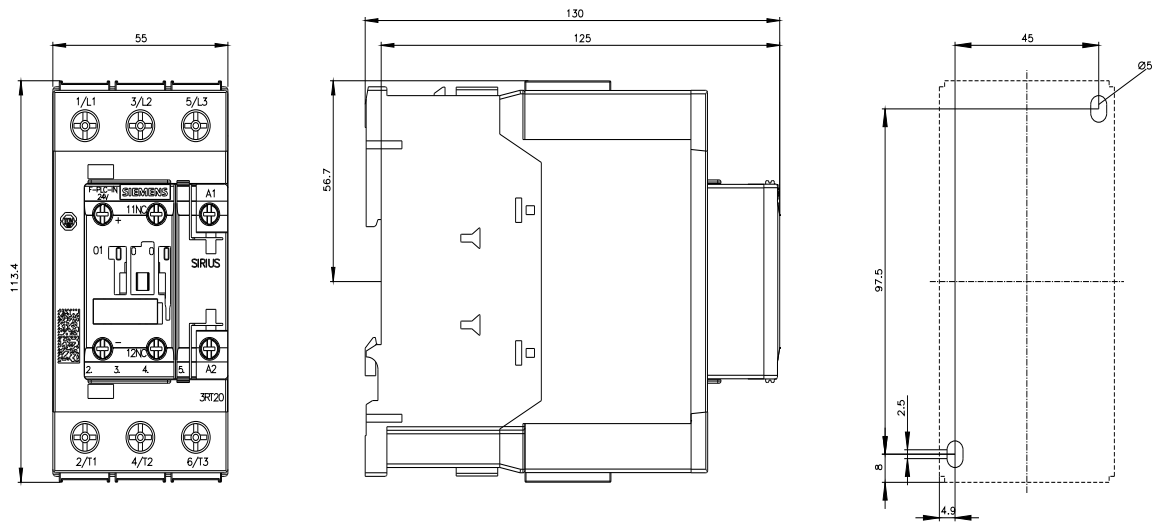

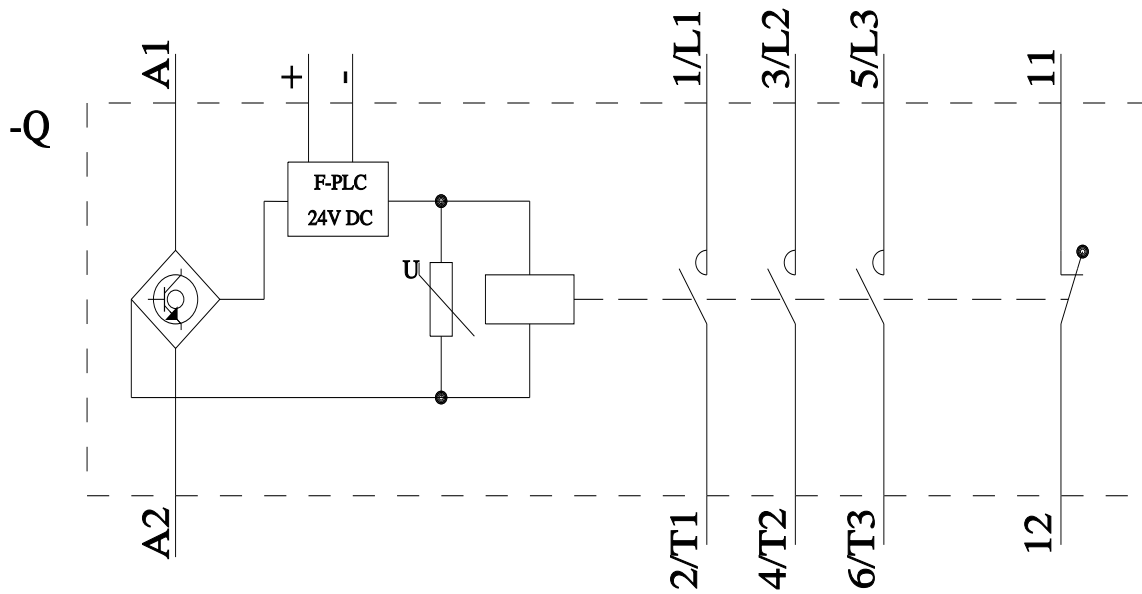

last modified:

4/30/2026 