

Product datasheet

Specifications



Straight length, Canalis KBB, 40 A,
2 circuits 3L+N+PE, 5 tap-off units,
3 m, white

Local distributor code:
23347339

KBB40ED44305W

EAN Code: 3606480001840

Main

Range of product	Canalis
Device short name	KBB
Offer type	Classic
Product or component type	Straight length
Busbar description	Distribution length
Device application	Lighting Power socket distribution
[Ie] rated operational current	40 A at 35 °C
[Ue] rated operational voltage	230...400 V
Network frequency	50/60 Hz
Busbar trunking polarity	3L + N + PE
Number of circuits	2
Number of tap-off outlets	5
Control type	Without
Mounting mode	By screws

Complementary

[Uimp] rated impulse withstand voltage	4 kV
[Ui] rated insulation voltage	690 V
[Icw] rated short-time withstand current	0.94 kA
[Ipk] rated peak withstand current	9.6 kA
Thermal stress limit	900 kA ² .s
Maximum radiated magnetic field	2 pT
THDI	0...15 % 40 A 15...33 % 32 A 33...100 % 28 A
Maximum voltage drop	<0.3 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.28 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.25 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.22 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Standards	EN/IEC 61439-6 EN/IEC 61439-1
Width	30 mm
Height	46 mm
Length	3 m

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Colour	White (RAL 9003)
Net weight	6.1 kg

Environment

IP degree of protection	IP55 conforming to EN/IEC 60529
IK degree of protection	IK06 conforming to EN/IEC 62262
Ambient air temperature for operation	0...35 °C (100 % of In) 35...40 °C (96 % of In) 40...45 °C (93 % of In) 45...50 °C (89 % of In) 50...55 °C (85 % of In)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.0 cm
Package 1 Width	6.2 cm
Package 1 Length	309.7 cm
Package 1 Weight	6.0 kg
Unit Type of Package 2	BB1
Number of Units in Package 2	6
Package 2 Height	12.6 cm
Package 2 Width	16 cm
Package 2 Length	314.4 cm
Package 2 Weight	37 kg
Unit Type of Package 3	PAL
Number of Units in Package 3	72
Package 3 Height	51 cm
Package 3 Width	64 cm
Package 3 Length	320 cm
Package 3 Weight	464 kg

Logistical informations

Country of origin	FR
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
Halogen-free status	Halogen free product
PVC free	Yes
Silicone-free	Yes


Use Longer

 Lifetime extension	
Repair	No

Use Again

 Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimension Drawings

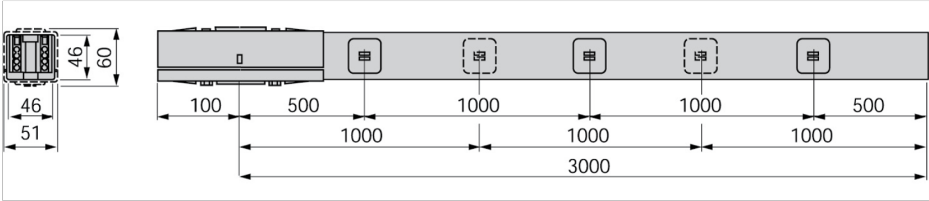

Technical Illustration

Assembly's dimensions

