

auxiliary switch, on the front, 4 NO, 53/54, 63/64, 73/74, 83/84, current path: 1 NO, 1 NO, 1 NO, 1 NO, spring-loaded terminal, for contactors 3RT2 and contactor relays 3RH2, multi-unit packaging, pack = 196 units

|                                                                          |                                          |
|--------------------------------------------------------------------------|------------------------------------------|
| <b>product brand name</b>                                                | SIRIUS                                   |
| <b>product category</b>                                                  | Auxiliary switch                         |
| <b>product designation</b>                                               | auxiliary switch                         |
| <b>design of the product</b>                                             | for snapping onto the front              |
| <b>product type designation</b>                                          | 3RH29                                    |
| <b>suitability for use</b>                                               | for 3RT2.1, 3RT2.2, 3RT2.3, 3RT2.4, 3RH2 |
| <b>General technical data</b>                                            |                                          |
| insulation voltage with degree of pollution 3 at AC rated value          | 690 V                                    |
| <b>surge voltage resistance rated value</b>                              | 6 kV                                     |
| protection class IP on the front                                         | IP20                                     |
| <b>mechanical service life (operating cycles) typical</b>                | 10 000 000                               |
| electrical endurance (operating cycles) at AC-15 at 230 V typical        | 200 000                                  |
| <b>Substance Prohibitance (day/month/year)</b>                           | 10/01/2009                               |
| <b>Net Weight</b>                                                        | 0.192 kg                                 |
| <b>number of NC contacts for auxiliary contacts</b>                      |                                          |
| • instantaneous contact                                                  | 0                                        |
| • lagging switching                                                      | 0                                        |
| <b>number of NO contacts for auxiliary contacts</b>                      |                                          |
| • instantaneous contact                                                  | 4                                        |
| • leading contact                                                        | 0                                        |
| <b>number of CO contacts of auxiliary contacts instantaneous contact</b> | 0                                        |
| <b>operational current at AC-15 at 690 V rated value</b>                 | 1 A                                      |
| <b>operational current of auxiliary contacts at AC-12</b>                |                                          |
| • at 24 V                                                                | 10 A                                     |
| • at 230 V                                                               | 10 A                                     |
| <b>operational current of auxiliary contacts at AC-14</b>                |                                          |
| • at 125 V                                                               | 6 A                                      |
| • at 250 V                                                               | 6 A                                      |
| <b>operational current of auxiliary contacts at AC-12 maximum</b>        | 10 A                                     |
| <b>operational current of auxiliary contacts at AC-15</b>                |                                          |
| • at 24 V                                                                | 6 A                                      |
| • at 230 V                                                               | 6 A                                      |
| • at 400 V                                                               | 3 A                                      |
| <b>operational current of auxiliary contacts at DC-12</b>                |                                          |
| • at 24 V                                                                | 10 A                                     |
| • at 110 V                                                               | 3 A                                      |
| • at 220 V                                                               | 1 A                                      |
| <b>operational current with 2 current paths in series at DC-12</b>       |                                          |
| • at 24 V rated value                                                    | 10 A                                     |
| • at 60 V rated value                                                    | 10 A                                     |
| • at 110 V rated value                                                   | 4 A                                      |
| • at 220 V rated value                                                   | 2 A                                      |
| • at 440 V rated value                                                   | 1.3 A                                    |
| • at 600 V rated value                                                   | 0.65 A                                   |
| <b>operational current with 3 current paths in series at DC-12</b>       |                                          |
| • at 24 V rated value                                                    | 10 A                                     |
| • at 60 V rated value                                                    | 10 A                                     |
| • at 110 V rated value                                                   | 10 A                                     |

|                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                          | 3.6 A<br>2.5 A<br>1.8 A                                                                                                       |
| <b>operational current with 2 current paths in series at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                         | 10 A<br>3.5 A<br>1.3 A<br>0.9 A<br>0.2 A<br>0.1 A                                                                             |
| <b>operational current with 3 current paths in series at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                         | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A                                                                              |
| <b>operational current of auxiliary contacts at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 48 V</li> <li>• at 60 V</li> <li>• at 110 V</li> <li>• at 125 V</li> <li>• at 220 V</li> <li>• at 250 V</li> </ul>                                                                                                                       | 6 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.3 A                                                                           |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V                                                                                                                                                                                                                                                         | C characteristic: 10 A; 0.4 kA                                                                                                |
| <b>contact reliability of auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                  | 1 faulty switching per 100 million (17 V, 1 mA)                                                                               |
| <b>Ambient conditions</b>                                                                                                                                                                                                                                                                                                                                         |                                                                                                                               |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>                                                                                                                                                                                                                                         | -25 ... +60 °C<br>-55 ... +80 °C                                                                                              |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                                                                        |                                                                                                                               |
| <b>product function</b> <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> </ul>                                                                                                                                                                           | Yes; with 3RT2<br>Yes                                                                                                         |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                   |                                                                                                                               |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V                                                                                                                                                                                                                                                         | C characteristic: 10 A; 0.4 kA                                                                                                |
| design of the fuse link for short-circuit protection of the auxiliary switch required                                                                                                                                                                                                                                                                             | gG: 10 A (690 V, 1 kA)                                                                                                        |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                         |                                                                                                                               |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                           | snap-on mounting                                                                                                              |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                     | 41.5 mm                                                                                                                       |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                      | 36 mm                                                                                                                         |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                      | 47.7 mm                                                                                                                       |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                     |                                                                                                                               |
| type of electrical connection for auxiliary and control circuit                                                                                                                                                                                                                                                                                                   | spring-loaded terminals                                                                                                       |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>                                                                                                                | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>                                     |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul> | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 14) |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>                                                                                                                                                                                                                                                                             | 20 ... 14                                                                                                                     |

## Approvals Certificates

### Environmental Product Declaration

- |                                                            |           |
|------------------------------------------------------------|-----------|
| • global warming potential [CO2 eq] / during manufacturing | 0.34 kg   |
| • global warming potential [CO2 eq] / during operation     | 0.562 kg  |
| • global warming potential [CO2 eq] / after end of life    | 0.0172 kg |
| • global warming potential [CO2 eq] / total                | 0.92 kg   |

### Environment

### General Product Approval

[Environmental Confirmations](#)



### General Product Approval

#### EMV

#### Functional Safety

#### Test Certificates

#### Maritime application



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



### Maritime application



### other

### Railway

[Confirmation](#)



[Miscellaneous](#)

[Special Test Certificate](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2911-2XA40-0MA0-Z W96>

### Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2911-2XA40-0MA0-Z W96>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RH2911-2XA40-0MA0-Z W96>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2911-2XA40-0MA0-Z W96&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2911-2XA40-0MA0-Z W96&lang=en)

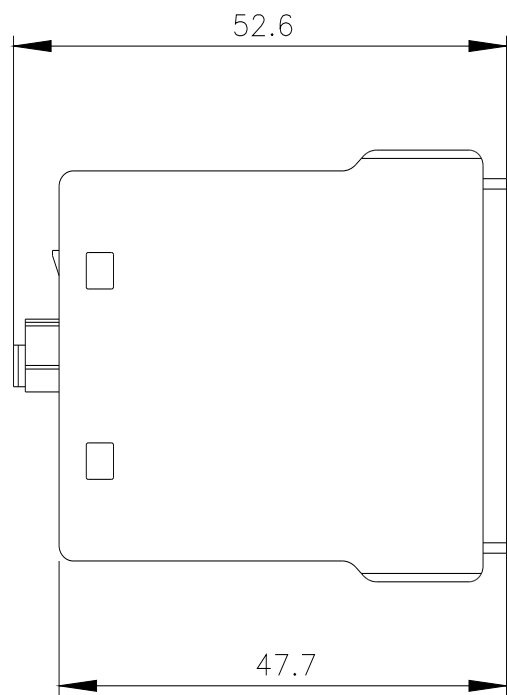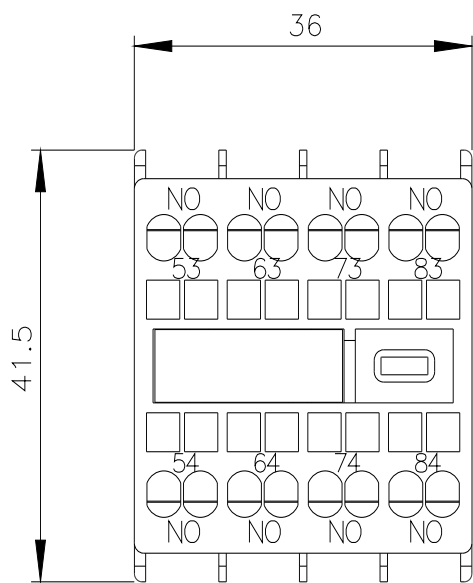

**3RT2**

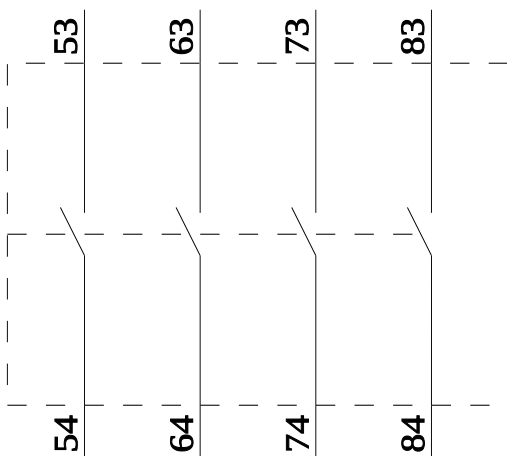

**3RH2**

