

Article No. : 6SL3310-1GH31-5AA3

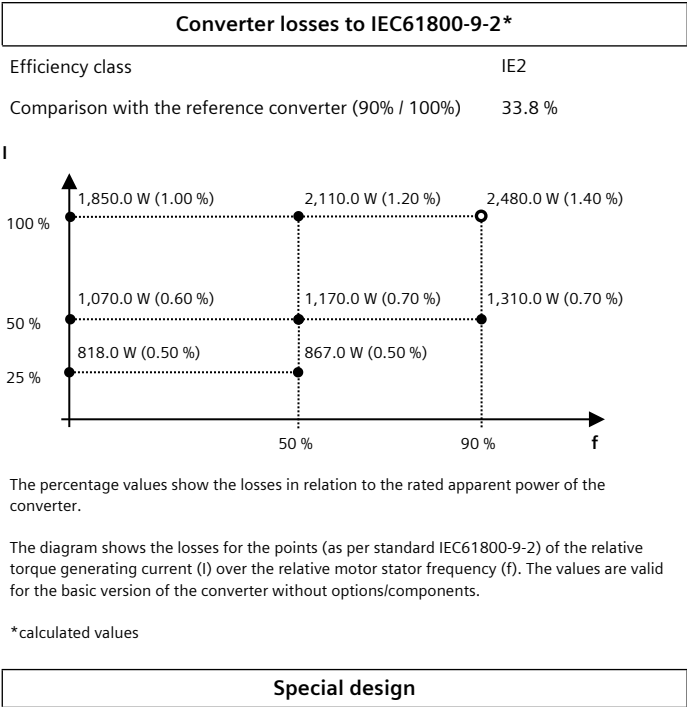


Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		
Input		
Supply frequency	47...63 Hz	
Supply voltage	690 V ±10 %	
Rated input current	164 A	
Max. current	232 A	
Pulse number	6	
Energy recovery capability	No	(2Q)
Output		
Output voltage	690 V	
Rated power (LO) in kW	132 kW	
Rated power (HO) in kW	110 kW	
Rated output current	150 A	
Rated output current (LO)	142 A	
Rated output current (HO)	134 A	
Output current Max	213 A	
Pulse frequency (factory setting)	1.25 kHz	
Basic data		
Power losses ΔP	2.48 kW	
Sound pressure level L _{pA} (1 m)	64 dB	
Conductor cross section, max. (IEC)	4 x 240 mm ²	
Degree of protection	IP20	
Dimensions (H x W x D)	1,400 mm x 326 mm x 356 mm	
Weight approx.	104 kg	
Frame size	FX	
Environmental conditions		
Installation altitude	1,000 m	
Coolant	Air	
Coolant requirement, air	0.17 m³/s	
Ambient temperature	0 °C - +40 °C	



Special design
Line-side power components
Load-side power components
DC link components
Supplementary system components
6SL30401GA011AA0 - Control Unit Kit CU320-2 PN (PROFINET, EtherNet/IP)