

Product datasheet

Specifications



Unity processor - Transparent Ready - 8 racks (12 slots),16 racks (4/6/8 slots)

TSXP575634MC

! Discontinued - Service only

! Discontinued on: 01 Nov 2022

! End-of-service on: 31 Dec 2025

Price: 249,543.00 ZAR

Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

Complementary

Concept	Transparent Ready
Number of racks	16 4/6/8 slots 8 12 slots
Number of slots	128 96 64
Discrete I/O processor capacity	2040 I/O
Analogue I/O processor capacity	512 I/O
Number of application specific channel	64
Number of process control channel	30 up to 90 simple loops
Integrated connection type	Non isolated serial link female mini DIN connector (RS485) (19.2 kbit/s) Ethernet TCP/IP RJ45 connector USB port (12 Mbit/s)
Port Ethernet	10BASE-T/100BASE-TX
Communication module processor capacity	1 3 8 5
Memory description	Internal RAM (with PCMCIA card) 1024 kB data Internal RAM (with PCMCIA card) 7168 kB program Internal RAM (without PCMCIA card) 1024 kB program and data PCMCIA card 16384 kB additional data storage
Maximum size of object areas	128 %MWi internal words located internal data 32768 %Mi located internal bits 64 %KWi constant words located internal data Unlimited (DFB and EFB function blocks) unlocated internal data Unlimited (elementary and derived data) unlocated internal data
Application structure	128 event tasks 1 master task 4 auxiliary tasks 1 fast task 32 timers

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Execution time per instruction	0.0375...0.045 µs Boolean with PCMCIA card 0.0375...0.045 µs Boolean without PCMCIA card 0.045...0.06 µs word or fixed-point arithmetic with PCMCIA card 0.045...0.06 µs word or fixed-point arithmetic without PCMCIA card 0.48...0.56 µs floating points with PCMCIA card 0.48...0.56 µs floating points without PCMCIA card
Number of instructions per ms	14 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 14 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 20.26 Kinst/ms 100 % Boolean with PCMCIA card 20.26 Kinst/ms 100 % Boolean without PCMCIA card
System overhead	0.07 ms for fast task 1 ms for master task
Marking	CE
Local signalling	1 LED (green) for Ethernet TCP/IP port ready (RUN) 1 LED (green) for processor running (RUN) 1 LED (red) for collision detection (COL) 1 LED (red) for Ethernet TCP/IP port fault (ERR) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on TER or AUX terminal port (TER) 1 LED (yellow) for Ethernet link diagnostics (STS) 1 LED (yellow) for reception activity (RX) 1 LED (yellow) for transmission activity (TX)
Current consumption	1680 mA at 5 V DC
Module format	Double
Product weight	0.61 kg

Environment

Standards	UL 508 CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group C 93/68/EEC 89/336/EEC 73/23/EEC CSA C22.2 No 213 Class I Division 2 Group A 92/31/EEC CSA C22.2 No 142 IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group D
Product certifications	RINA BV GL LR DNV RMRS ABS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	Conformal coating Humiseal 1A33 TC
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	9.500 cm
Package 1 Width	18.000 cm
Package 1 Length	26.000 cm
Package 1 Weight	1.061 kg
Unit Type of Package 2	S03
Number of Units in Package 2	4
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.244 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

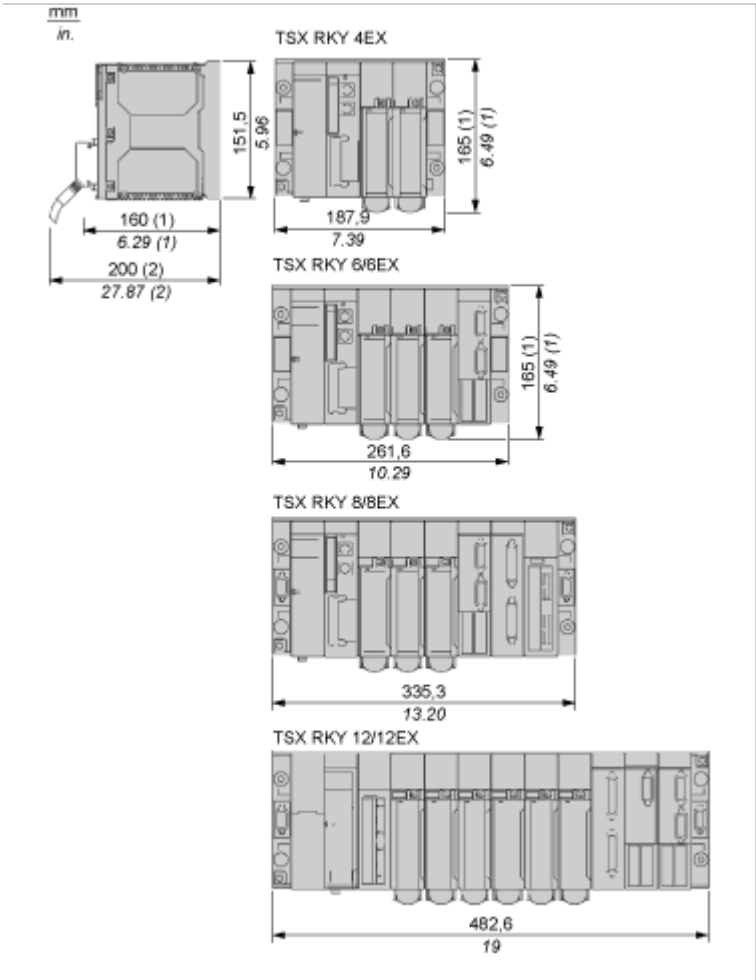

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.