

Product data sheet

Specifications



Mini circuit breaker, QO, 15A, 3 pole, 240VAC, 65kA, plug in, AC shunt

QH3151021

⚠ Discontinued on: Jul 30, 2020

⚠ End-of-service on: Sep 22, 2020

⚠ Discontinued

Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	15 A
Voltage Rating	240 V AC
Mounting Type	Plug-in
Number of Poles	3P
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Pressure plate
Options	Shunt trip 120/208/240 V AC

Complementary

Interrupt Rating	65 kA 240 V AC
Number of Panel Spaces	4
Wire Size	AWG 14...AWG 8 copper or aluminium
Tightening Torque	40.7 lbf.in (4.6 N.m)
Height	3.0 in (76 mm)
Width	3.0 in (76 mm)
Depth	2.9 in (74 mm)
Product Weight	1.199 lb(US) (0.544 kg)

Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

Ordering and shipping details

Category	00926-QO IND SPECIALTY CB
Discount Schedule	DE2A
Returnability	No
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.200 in (8.128 cm)
Package 1 Width	3.700 in (9.398 cm)
Package 1 Length	4.600 in (11.684 cm)
Package weight(Lbs)	19.200 oz (544.311 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)


[How we assess product sustainability >](#)

Use Longer

Lifetime extension	
Repair	No

Technical Illustration

Dimensions

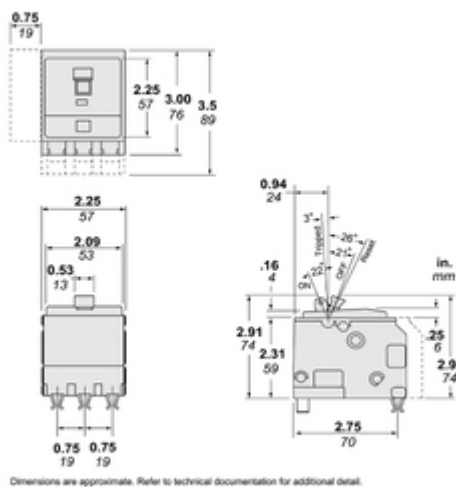

Technical Illustration

Wiring diagram

