


Definite purpose contactors

20A ... 90A

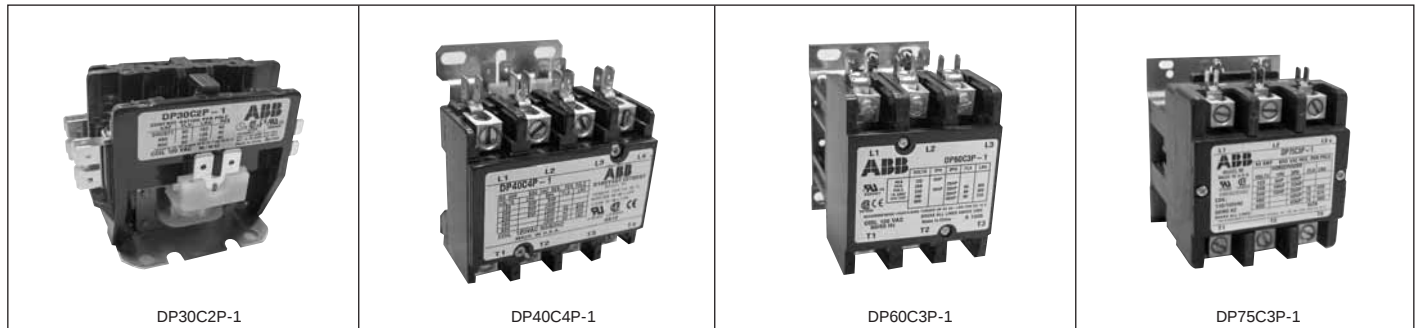

20A, 25A, 30A, 40A, 50A, 60A, 75A & 90A

Full load amps	Number of poles	Locked rotor amps			Resistive amps	Maximum HP 1 phase		Maximum HP 3 phase				Standard pack qty.	Catalog number	List price
		240/277V	480V	600V		120V	240V	200/208V	240/277V	480V	600V			
20	1	120	100	80	30	1	2	—	—	—	—	50	DP20C1P-1	
20	2	120	100	80	30	1	2	—	—	—	—	50	DP20C2P-1	
20	3	120	100	80	30	1.5	3	7.5	7.5	7.5	7.5	25	DP20C3P-1	
25	1	150	125	100	35	1	2	—	—	—	—	50	DP25C1P-1	
25	2	150	125	100	35	1	2	—	—	—	—	50	DP25C2P-1	
25	3	150	125	100	35	2	5	10	10	15	20	25	DP25C3P-1	
30	1	150	125	100	40	1	2	—	—	—	—	50	DP30C1P-1	
30	2	150	125	100	40	2	3	—	—	—	—	50	DP30C2P-1	
30	3	180	150	120	40	2	5	10	10	15	20	25	DP30C3P-1	
30	4	180	150	120	40	2	5	10	10	10	—	25	DP30C4P-1	
40	2	200	160	120	50	2	3	—	—	—	—	50	DP40C2P-1	
40	3	240	200	160	50	3	7.5	10	10	20	25	25	DP40C3P-1	
40	4	240	200	160	50	3	7.5	10	10	10	—	25	DP40C4P-1	
50	3	300	250	200	65	3	10	15	15	25	25	25	DP50C3P-1	
60	3	360	300	240	75	5	10	20	25	30	30	25	DP60C3P-1	
75	3	450	375	300	93	5	15	20	25	40	40	5	DP75C3P-1	
90	3	540	450	360	120	7.5	20	25	30	50	50	5	DP90C3P-1	

Coil voltage selection chart

Voltage	24VAC	120VAC	208/240VAC	277VAC
Suffix #	F	1	2	C

Coil voltage selection

All catalog numbers include a 120VAC coil. To select other coil voltages, substitute the code from the coil voltage selection chart for the first digit after the dash in the catalog number.

Auxiliary contact blocks

Description	Catalog number 20A - 40A, 3P	Catalog number 20A - 40A, 4P	Catalog number 50A - 60A	Catalog number 70A - 90A	List price
Form C SPDT 1 N.O. & 1 N.C.	CADP40-10 CADP40-11	CADP40A-10 CADP40A-11	CADP60-10 CADP60-11	CADP90-10 -	

Contact rating of 1 N.O. & 1 N.C.

		120V	240V	480V	600V
Break	A	3.0	1.5	.75	.6
Make	A	30	15	7.5	6
Continuous	A	10	10	10	10

Quick connect terminals on all auxiliary switches are .250 wide.

Contact rating of SPDT

Voltage	Current rating
125VAC	10A, 1/3 HP
120VAC	4A on lamp load
250VAC	10A, 1/3 HP
125VDC	.5A
250VDC	.25A