


Meter Centers

Uni-PAK Metering: WP Ringless Style, No Bypass

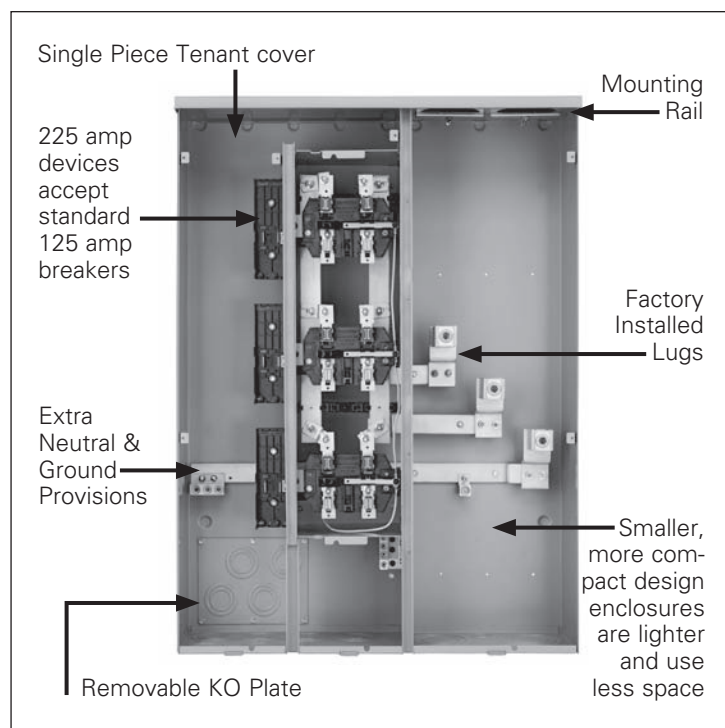

Features

- Ringless meter construction
- Individual split covers with barrel lock compatibility
- Available with horn bypass factory installed
- UL Listed for 60/75°C conductors See equipment markings for applications
- For small apartment buildings, small professional and commercial buildings
- Completely self-contained meter centers
- Two to six 125A and 225A breaker positions
- Compact, pre-bussed, easy to handle, hang and wire
- Barrired, sealable compartment for unmetered current-carrying parts
- Al/Cu lay-in lugs, except two position 125A units
- Top or bottom feed
- Bottom and rear branch wiring exits (Neutral and ground at bottom only)
- ANSI #61 light grey electrodeposited paint on zinc-coated steel
- 5th jaw kit included with each unit

2
METER
CENTERS

Ringless Style Uni-PAK 120/240V 1 Phase, 3 Wire

Max. Tenant Main ^①	Bus Amperage	Meter Positions Per Pak	Old Catalog Number	NEW Catalog Number Available Sept. 2011	Breaker Provision	Max. AIC	Dimensions ^①			5th Jaw ^① Assembly	Horn Bypass ^① Kit	Line Lugs Wire Range ^①
							Height	Width	Depth			
125	200	2	SP2211RJ	WP2211RJ	QP, QPH, HQP, MP-T, MP-HT, MP-MT	65,000	26.20	13.79	6.02	INCL.	ECMFH	#6-300 kcmil
	300	3	SP3311RJ	WP3311RJ			38.69	25.42				#2-600 kcmil
	400	4	SP4411RJ	WP4411RJ			47.69					1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU
	500	4	NA	WP5411RJ			38.69	39.10				
	600	5	SP6511RJ	WP6511RJ			47.69	26.47				(2) #2-600 kcmil
	600	6	SP6611RJ	WP6611RJ			38.69	40.00				
225	400	2	SP4212RJ	WP4212RJ	QP, QPH, HQP, MP-T, MP-HT, MP-MT, QS, QSH, QSHH, HQS, HQSH	100,000	29.69			INCL.	ECMFH	1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU
	400	3	SP4312RJ	WP4312RJ			38.69	28.53				
	400	4	SP4412RJ	WP4412RJ			47.69					
	600	5	NA	WP6412RJ				29.75				(2) #2-600 kcmil
	600	5	SP6512RJ	WP6512RJ				46.22				
	600	6	SP6612RJ	WP6612RJ								(2) 1/0-750 kcmil or (4) 1/0-250 AL or (4) 1/0-3/0 CU
	800	6	NA	WP8612RJ			38.69	51.04				
	1000	6	NA	WP10612RJ				56.56				(3) #2-500 kcmil

Multi-family
Metering

① Dimensions and information shown are for WPXXX units.
For old style information, please see the 2008 Speedfax.