

Product data sheet

Specifications



ALL-IN-ONE RINGLESS OH200ASURFACEHORNSOL

SO2040M200SS

Discontinued on: Sep 21, 2020

Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product or Component Type	All-In-One
Range of Product	Homeline
Meter socket type	Ringed
Hub type	A

Complementary

Line Rated Current	200 A
Short-circuit current	22 kA
Mounting	Surface
Number of spaces	20
Number of circuits	40
Number of Tandem Breakers	20
Electrical connection	Lugs, line side Lugs, service ground
Wire Size	AWG 6...350 kcmil (aluminium/copper) line side AWG 8...AWG 2/0 (aluminium/copper) service ground
Tightening torque	Main lugs 250 lb.in, AWG 6...350 kcmil, aluminium/copper Branch lugs 50 lb.in, AWG 14...AWG 1/0, copper Branch lugs 50 lb.in, AWG 12...AWG 1/0, aluminium Branch lugs 50 lb.in, AWG 3...AWG 2/0, aluminium/copper Branch lugs 45 lb.in, AWG 6...AWG 4, aluminium/copper Branch lugs 40 lb.in, AWG 8, aluminium/copper Branch lugs 35 lb.in, AWG 14...AWG 10, aluminium/copper Branch lugs 35 lb.in, AWG 12...AWG 10, aluminium/copper Cover 10 lb.in
Disconnect	Service disconnect (factory installed)
Disconnect Rating	200 A
Branch Breaker Rating	200 A
Service feed location	OH
Bypass type	No bypass
Width	18.76 in (476.50 mm)
Depth	5.41 in (137.41 mm)
Height	41.18 in (1045.97 mm)

Ordering and shipping details

Category	US1DE3A00148
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	DE3A
GTIN	00785901967644
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package weight(Lbs)	65.001 lb(US) (29.484 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained](#) >

[How we assess product sustainability](#) >

Use Better


Materials and Substances	
EU RoHS Directive	Compliant

Use Longer

Lifetime extension	
Repair	No

Technical Illustration

Dimensions

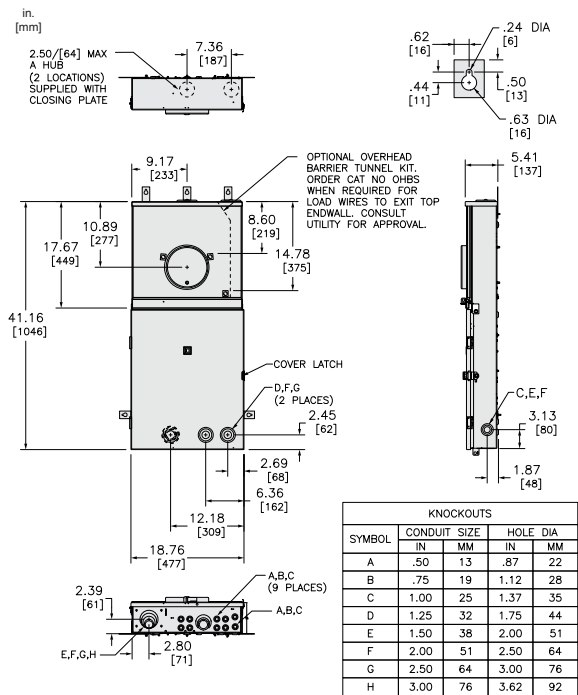

All dimensions are approximate.
Also see technical drawings and documentation.

Technical Illustration

Wiring diagram

