



contactor relay, 6 NO + 2 NC, 110 V AC, 50 Hz / 120 V, 60 Hz, screw terminal, frame size S00, captive auxiliary switch

|  |  |
|--|--|
| product brand name   | SIRIUS   |
| product designation  | Auxiliary contactor  |
| product type designation   | 3RH2   |
| <b>General technical data</b>  |  |
| size of contactor  | S00  |
| product extension auxiliary switch   | No   |
| power loss [W] for rated value of the current without load current share typical | 1.43 W   |
| insulation voltage with degree of pollution 3 at AC rated value                  | 690 V  |
| degree of pollution  | 3  |
| surge voltage resistance rated value   | 6 kV   |
| shock resistance at rectangular impulse  |  |
| • at AC  | 7,3 g / 5 ms, 4,7 g / 10 ms  |
| shock resistance with sine pulse   |  |
| • at AC  | 11,4 g / 5 ms, 7,3 g / 10 ms   |
| mechanical service life (operating cycles)                                       |  |
| • of contactor typical   | 10 000 000   |
| reference code according to IEC 81346-2  | K  |
| Substance Prohibitance (day/month/year)  | 10/01/2009   |
| SVHC substance name  | 2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol (UV-329) CAS-No. 3147-75-9 |
| Net Weight   | 285 g  |
| <b>Ambient conditions</b>  |  |
| installation altitude at height above sea level maximum                          | 2 000 m  |
| ambient temperature  |  |
| • during operation   | -25 ... +60 °C   |
| • during storage   | -55 ... +80 °C   |
| relative humidity minimum  | 10 %   |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                   | 95 %   |
| <b>Main circuit</b>  |  |
| no-load switching frequency  |  |
| • at AC  | 10 000 1/h   |
| • at DC  | 10 000 1/h   |
| <b>Control circuit/ Control</b>  |  |
| type of voltage of the control supply voltage                                    | AC   |
| control supply voltage at AC   |  |
| • at 50 Hz rated value   | 110 V  |
| • at 60 Hz rated value   | 120 V  |
| control supply voltage frequency   |  |

|   |              |
|---|--------------|
| <ul style="list-style-type: none"> <li>• 1 rated value</li> </ul>                     | 50 Hz        |
| <ul style="list-style-type: none"> <li>• 2 rated value</li> </ul>                     | 60 Hz        |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                          | 0.8 ... 1.1  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                          | 0.85 ... 1.1 |
| <b>apparent pick-up power of magnet coil at AC</b>                                    | 37 VA        |
| <b>inductive power factor with closing power of the coil</b>                          | 0.8          |
| <b>apparent holding power of magnet coil at AC</b>                                    | 5.7 VA       |
| <b>inductive power factor with the holding power of the coil</b>                      | 0.25         |
| <b>closing delay</b>  |              |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                             | 8 ... 33 ms  |
| <b>opening delay</b>  |              |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                             | 4 ... 15 ms  |
| <b>arcing time</b>  | 10 ... 15 ms |
| <b>Auxiliary circuit</b>  |              |
| <b>number of NC contacts for auxiliary contacts</b>                                   | 2            |
| <ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>             | 2            |
| <b>number of NO contacts for auxiliary contacts</b>                                   | 6            |
| <ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>             | 6            |
| <b>identification number and letter for switching elements</b>                        | 62 E         |
| operational current at AC-12 maximum  | 10 A         |
| <b>operational current at AC-15</b>   |              |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>              | 6 A          |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>              | 3 A          |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>              | 2 A          |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>              | 1 A          |
| <b>operational current at 1 current path at DC-12</b>                                 |              |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>               | 6 A          |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>              | 3 A          |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>              | 1 A          |
| <ul style="list-style-type: none"> <li>• at 440 V rated value</li> </ul>              | 0.3 A        |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>              | 0.15 A       |
| <b>operational current with 2 current paths in series at DC-12</b>                    |              |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>              | 4 A          |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>              | 2 A          |
| <ul style="list-style-type: none"> <li>• at 440 V rated value</li> </ul>              | 1.3 A        |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>              | 0.65 A       |
| <b>operational current with 3 current paths in series at DC-12</b>                    |              |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>              | 10 A         |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>              | 3.6 A        |
| <ul style="list-style-type: none"> <li>• at 440 V rated value</li> </ul>              | 2.5 A        |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>              | 1.8 A        |
| <b>operating frequency at DC-12 maximum</b>   | 1 000 1/h    |
| <b>operational current at 1 current path at DC-13</b>                                 |              |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>               | 6 A          |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>               | 2 A          |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>              | 1 A          |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>              | 0.3 A        |
| <ul style="list-style-type: none"> <li>• at 440 V rated value</li> </ul>              | 0.14 A       |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>              | 0.1 A        |
| <b>operational current with 2 current paths in series at DC-13</b>                    |              |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>               | 10 A         |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>               | 3.5 A        |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 1.3 A<br>0.9 A<br>0.2 A<br>0.1 A  |
| <b>operational current with 3 current paths in series at DC-13</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A  |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)   |
| <b>UL/CSA ratings</b>   |   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600   |
| <b>Short-circuit protection</b>   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA  |
| design of the fuse link for short-circuit protection of the auxiliary switch required   | gG: 10 A (690 V, 1 kA)  |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail  |
| <b>height</b>   | 57.5 mm   |
| <b>width</b>  | 45 mm   |
| <b>depth</b>  | 117 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm   |
| <b>Connections/ Terminals</b>   |   |
| type of electrical connection for auxiliary and control circuit   | screw-type terminals  |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| <b>Safety related data</b>  |   |
| <b>product function</b>   |   |
| <ul style="list-style-type: none"> <li>• positively driven operation according to IEC 60947-5-1</li> <li>• suitable for safety function</li> </ul>  | Yes<br>Yes  |
| suitability for use safety-related switching OFF  | Yes   |
| <b>service life maximum</b>   | 20 a  |
| <b>proportion of dangerous failures</b>   |   |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>   | 40 %<br>73 %  |

|   |  |
|---|--|
| B10 value with high demand rate according to SN 31920         | 1 000 000; With 0.3 x I <sub>e</sub>             |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT  |
| ISO 13849   |  |
| device type according to ISO 13849-1                          | 3  |
| overdimensioning according to ISO 13849-2 necessary           | Yes  |
| IEC 61508   |  |
| safety device type according to IEC 61508-2                   | Type A   |
| Electrical Safety   |  |
| protection class IP on the front according to IEC 60529       | IP20   |
| touch protection on the front according to IEC 60529          | finger-safe, for vertical contact from the front |

#### Approvals Certificates

|  |   |
|--|---|
| Environmental Product Declaration  |   |
| <ul style="list-style-type: none"> <li>global warming potential [CO<sub>2</sub> eq] / during manufacturing</li> <li>global warming potential [CO<sub>2</sub> eq] / during operation</li> <li>global warming potential [CO<sub>2</sub> eq] / after end of life</li> <li>global warming potential [CO<sub>2</sub> eq] / total</li> </ul> | <ul style="list-style-type: none"> <li>1.43 kg</li> <li>94.1 kg</li> <li>-0.0159 kg</li> <li>95.5 kg</li> </ul> |

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)



|                          |     |                   |
|--------------------------|-----|-------------------|
| General Product Approval | EMV | Functional Safety |
|--------------------------|-----|-------------------|



[Type Examination Certificate](#)

|                   |                      |
|-------------------|----------------------|
| Test Certificates | Maritime application |
|-------------------|----------------------|

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



|                      |       |
|----------------------|-------|
| Maritime application | other |
|----------------------|-------|



[Confirmation](#)

[Miscellaneous](#)



#### Railway

[Special Test Certificate](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2262-1AK60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2262-1AK60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2262-1AK60&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2262-1AK60&lang=en)



Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2262-1AK60>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

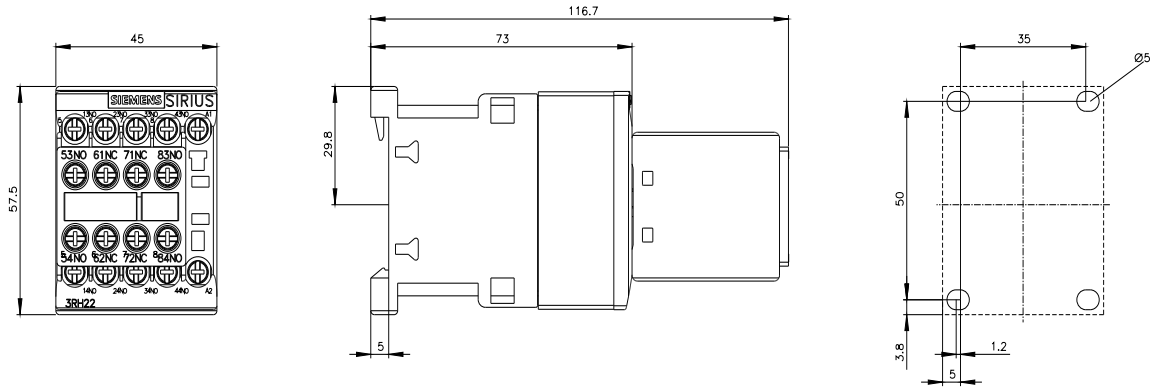

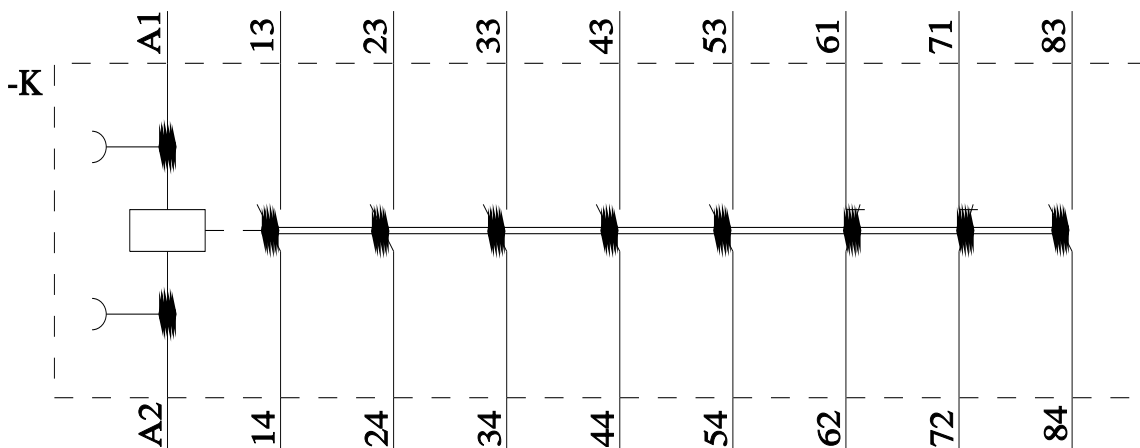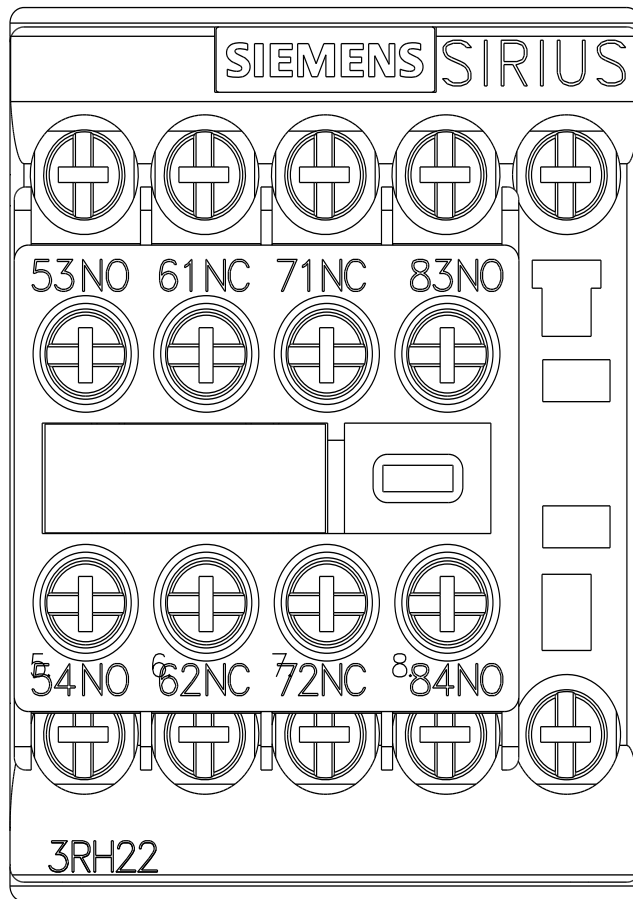

last modified:

4/9/2026 