


Product datasheet

Specifications

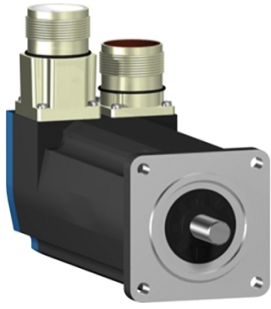

AC servo motor BSH - 1.3 N.m - 3000 rpm - untapped shaft - with brake - IP50

BSH0553P02F1A

! Discontinued

! Discontinued on: 18 Apr 2024

! To be end-of-service on: 18 Apr 2026

Main

Device short name	BSH
Product or component type	Servo motor
Maximum mechanical speed	9000 rpm
Continuous stall torque	<p>1.05 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase</p> <p>1.05 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase</p> <p>1.3 N.m for LXM05AD10M2, 200...240 V, single phase</p> <p>1.3 N.m for LXM05BD10M2, 200...240 V, single phase</p> <p>1.3 N.m for LXM05CD10M2, 200...240 V, single phase</p> <p>1.3 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>1.3 N.m for LXM05BD10M3X at 1.5 A, 200...240 V, three phase</p> <p>1.3 N.m for LXM05CD10M3X, 200...240 V, three phase</p> <p>1.3 N.m for LXM15LD13M3, 230 V, single phase</p> <p>1.3 N.m for LXM15LD13M3, 230 V, three phase</p> <p>1.3 N.m for LXM15LD10N4, 400 V, three phase</p> <p>1.3 N.m for LXM05AD14N4, 380...480 V, three phase</p> <p>1.3 N.m for LXM05BD14N4, 380...480 V, three phase</p> <p>1.3 N.m for LXM05CD14N4, 380...480 V, three phase</p>
Peak stall torque	<p>3.5 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase</p> <p>3.5 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase</p> <p>2.7 N.m for LXM15LD13M3, 230 V, single phase</p> <p>3.18 N.m for LXM05AD10M2, 200...240 V, single phase</p> <p>3.18 N.m for LXM05BD10M2, 200...240 V, single phase</p> <p>3.18 N.m for LXM05CD10M2, 200...240 V, single phase</p> <p>2.7 N.m for LXM15LD13M3 at 1.5 A, 230 V, three phase</p> <p>3.87 N.m for LXM15LD10N4, 400 V, three phase</p> <p>3.18 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>3.87 N.m for LXM05AD14N4, 380...480 V, three phase</p> <p>3.18 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>3.87 N.m for LXM05BD14N4, 380...480 V, three phase</p> <p>3.18 N.m for LXM05CD10M3X, 200...240 V, three phase</p> <p>3.87 N.m for LXM05CD14N4, 380...480 V, three phase</p>
Nominal output power	<p>400 W for LXM32.U60N4 at 1.5 A, 400 V, three phase</p> <p>400 W for LXM32.U60N4 at 1.5 A, 480 V, three phase</p> <p>340 W for LXM15LD13M3, 230 V, three phase</p> <p>340 W for LXM15LD13M3, 230 V, single phase</p> <p>350 W for LXM05AD10M2, 200...240 V, single phase</p> <p>350 W for LXM05BD10M2, 200...240 V, single phase</p> <p>350 W for LXM05CD10M2 at 1.5 A, 200...240 V, single phase</p> <p>350 W for LXM05AD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05AD14N4, 380...480 V, three phase</p> <p>350 W for LXM05BD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05BD14N4, 380...480 V, three phase</p> <p>350 W for LXM05CD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05CD14N4, 380...480 V, three phase</p> <p>670 W for LXM15LD10N4, 400 V, three phase</p>

Nominal torque	0.65 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 0.65 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.08 N.m for LXM15LD13M3, 230 V, single phase 1.1 N.m for LXM05AD10M2, 200...240 V, single phase 1.1 N.m for LXM05BD10M2, 200...240 V, single phase 1.1 N.m for LXM05CD10M2, 200...240 V, single phase 0.8 N.m for LXM15LD10N4 at 1.5 A, 400 V, three phase 1.08 N.m for LXM15LD13M3, 230 V, three phase 1.1 N.m for LXM05AD10M3X, 200...240 V, three phase 1.1 N.m for LXM05AD14N4, 380...480 V, three phase 1.1 N.m for LXM05BD10M3X, 200...240 V, three phase 1.1 N.m for LXM05BD14N4, 380...480 V, three phase 1.1 N.m for LXM05CD10M3X, 200...240 V, three phase 1.1 N.m for LXM05CD14N4, 380...480 V, three phase
Nominal speed	6000 rpm for LXM32.U60N4 at 1.5 A, 400 V, three phase 6000 rpm for LXM32.U60N4 at 1.5 A, 480 V, three phase 3000 rpm for LXM05AD10M2, 200...240 V, single phase 3000 rpm for LXM05BD10M2, 200...240 V, single phase 3000 rpm for LXM05CD10M2, 200...240 V, single phase 3000 rpm for LXM05AD10M3X, 200...240 V, three phase 3000 rpm for LXM05AD14N4 at 1.5 A, 380...480 V, three phase 3000 rpm for LXM05BD10M3X, 200...240 V, three phase 3000 rpm for LXM05BD14N4, 380...480 V, three phase 3000 rpm for LXM05CD10M3X, 200...240 V, three phase 3000 rpm for LXM05CD14N4, 380...480 V, three phase 3000 rpm for LXM15LD13M3, 230 V, single phase 3000 rpm for LXM15LD13M3, 230 V, three phase 8000 rpm for LXM15LD10N4, 400 V, three phase
Product compatibility	LXM05AD10M2 at 200...240 V single phase LXM05BD10M2 at 200...240 V single phase LXM05CD10M2 at 200...240 V single phase LXM15LD13M3 at 230 V single phase LXM32.U60N4 at 400 V three phase LXM32.U60N4 at 480 V three phase LXM05AD10M3X at 200...240 V three phase LXM05BD10M3X at 200...240 V three phase LXM05CD10M3X at 200...240 V three phase LXM15LD13M3 at 230 V three phase LXM05AD14N4 at 380...480 V three phase LXM05BD14N4 at 380...480 V three phase LXM05CD14N4 at 380...480 V three phase LXM15LD10N4 at 400 V three phase
Shaft end	Untapped
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn x 4096 turns
Holding brake	With
Mounting support	International standard flange
Electrical connection	Straight connectors

Complementary

Range compatibility	Lexium 15 Lexium 32 Lexium 05
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	1.7 A
maximum continuous power	0.97 W

Maximum current Irms	8.7 A for LXM15LD13M3 8.7 A for LXM15LD10N4 6.5 A for LXM05AD10M2 6.5 A for LXM05AD10M3X 6.5 A for LXM05AD14N4 6.5 A for LXM05BD10M2 6.5 A for LXM05BD10M3X 6.5 A for LXM05BD14N4 6.5 A for LXM05CD10M2 6.5 A for LXM05CD10M3X 6.5 A for LXM05CD14N4 6 A for LXM32.U60N4
Maximum permanent current	6.5 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	9 mm
Shaft length	20 mm
Feedback type	Multiturn SinCos Hiperface
Holding torque	0.8 N.m holding brake
Motor flange size	55 mm
Number of motor stacks	3
Torque constant	0.7 N.m/A at 120 °C
Back emf constant	41 V/krpm at 120 °C
Rotor inertia	0.1553 kg.cm ²
Stator resistance	10.4 Ohm at 20 °C
Stator inductance	25 mH at 20 °C
Stator electrical time constant	2.4 ms at 20 °C
Maximum radial force Fr	190 N at 8000 rpm 200 N at 7000 rpm 210 N at 6000 rpm 230 N at 5000 rpm 240 N at 4000 rpm 270 N at 3000 rpm 310 N at 2000 rpm 390 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	10 W
Type of cooling	Natural convection
Length	203 mm
Centring collar diameter	40 mm
Centring collar depth	2 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	63 mm
Net weight	1.9 kg
Sizing reference	BSH0553P
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C

Temperature magnet hot	100 °C
------------------------	--------

Temperature magnet rt	20 °C
-----------------------	-------

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Height	12.3 cm
------------------	---------

Package 1 Width	12.8 cm
-----------------	---------

Package 1 Length	37.7 cm
------------------	---------

Package 1 Weight	1.55 kg
------------------	---------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances

PVC free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability

No need of specific recycling operations

WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors



- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)
- (3) For screw M3 x 9 mm/M3 x 0.35 in.

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)
b	b1	b	b1		
39.5	25.5	39.5	39.5	176.5	203

Dimensions in in.


Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)
b	b1	b	b1		
1.55	1.00	1.55	1.55	6.94	7.99

Performance Curves

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32-U60N4 servo drive

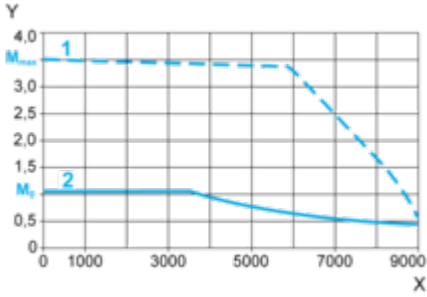

X Speed in rpm

Y Torque in Nm


1 Peak torque

2 Continuous torque

480 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•U60N4 servo drive

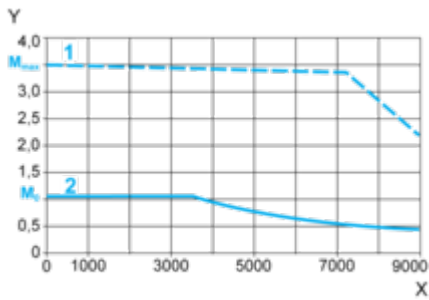

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque