



Miniature circuit breaker 230/400 V 4.5 kA, 1-pole, C, 4A

Figure similar

| Model  |   |
|--|---|
| product brand name   | SENTRON   |
| product designation  | Miniature circuit breaker   |
| General technical data   |   |
| number of poles  | 1   |
| design of pole   | 1P  |
| tripping characteristic class  | C   |
| mechanical service life (operating cycles) typical   | 10 000  |
| overvoltage category   | 3   |
| degree of pollution  | 2   |
| Voltage  |   |
| type of voltage of the operating voltage   | AC  |
| type of voltage  | Use only in alternating current or direct current circuits. Mixed use is not permitted.                                       |
| insulation voltage (U <sub>i</sub> )   |   |
| <ul style="list-style-type: none"> <li>with single-phase operation at AC rated value</li> <li>with multi-phase operation at AC rated value</li> </ul>  | 250 V<br>440 V  |
| <ul style="list-style-type: none"> <li>operational current                             <ul style="list-style-type: none"> <li>at 30 °C rated value</li> <li>at 40 °C rated value</li> <li>at 55 °C rated value</li> </ul> </li> <li>operational current at AC rated value</li> </ul> | 4 A<br>3.76 A<br>3.36 A<br>4 A  |
| Supply voltage   |   |
| supply voltage at AC   | 400 V   |
| value range of the supply voltage frequency  | 50/60 Hz  |
| operating voltage  |   |
| <ul style="list-style-type: none"> <li>with multi-phase operation at AC maximum</li> <li>at DC rated value maximum</li> <li></li> </ul>  | 440 V<br>62.5 V<br>The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V |
| Protection class   |   |
| protection class IP  | IP20, with connected conductors   |
| Breaking Capacity  |   |
| switching capacity current   |   |
| <ul style="list-style-type: none"> <li>according to EN 60898 rated value</li> <li>according to IEC 60947-2 rated value</li> </ul>  | 4.5 kA<br>5 kA  |
| energy limitation class  | 3   |

## Dissipation

|   |                                      |
|---|--------------------------------------|
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1.3 W                                |
| suitability for operation   | Residential buildings/infrastructure |

## Product details

|   |     |
|---|-----|
| product feature touch protection                    | Yes |
| product component neutral conductor switching       | No  |
| product feature halogen-free                        | Yes |
| product feature sealable                            | Yes |
| product feature silicon-free                        | Yes |
| product extension installable supplementary devices | Yes |

## Connections

|  |  |
|--|--|
| <b>connectable conductor cross-section solid</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                    | 0.75 mm <sup>2</sup><br>25 mm <sup>2</sup> |
| <b>connectable conductor cross-section stranded</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                 | 0.75 mm <sup>2</sup><br>25 mm <sup>2</sup> |
| <b>connectable conductor cross-section finely stranded with core end processing</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul> | 0.75 mm <sup>2</sup><br>25 mm <sup>2</sup> |
| <b>tightening torque with screw-type terminals</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                  | 2.5 N·m<br>3 N·m                           |

## Mechanical Design

|                               |       |
|-------------------------------|-------|
| height                        | 90 mm |
| width                         | 18 mm |
| depth                         | 76 mm |
| installation depth            | 70 mm |
| number of modular width units | 1     |
| mounting position             | any   |
| Net Weight                    | 132 g |

## Environmental conditions

|  |                 |
|--|-----------------|
| <b>ambient temperature during operation</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul> | -25 °C<br>45 °C |
| <b>ambient temperature during storage</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>   | -40 °C<br>75 °C |

## Approvals Certificates

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)

[Environmental Confirmations](#)



[Miscellaneous](#)



|                          |       |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|

[Confirmation](#)



[Confirmation](#)



## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL3104-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL3104-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL3104-7](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL3104-7)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

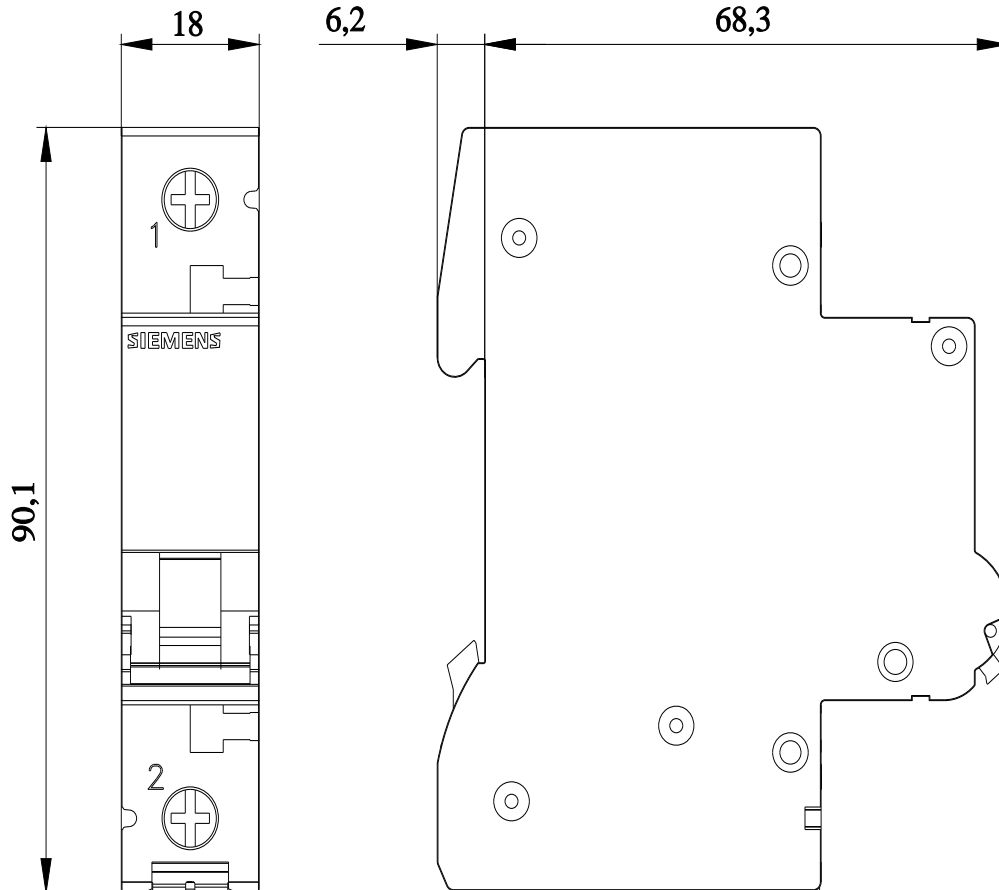



---

last modified:

7/22/2025 

