



circular conduc. terminal TA2.3 2 x 25...150 mm<sup>2</sup> for 2 cables; 4 units accessory for: 3VM12


Model	
product brand name	SETRON
product designation	accessories
design of the product	circular conductor terminal
accessories	Wire connector
General technical data	
designation / of the terminal	TA2.3
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	701 g
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	25 mm <sup>2</sup>
• for copper cable / stranded / maximum	150 mm <sup>2</sup>
• for aluminum cable / stranded / minimum	25 mm <sup>2</sup>
• for aluminum cable / stranded / maximum	150 mm <sup>2</sup>
stripped length	26 / 51 mm
tightening torque / when using copper cables	
• stranded	25 - 150 mm <sup>2</sup> : 31.1 Nm
• finely stranded	25 - 150 mm <sup>2</sup> : 31.1 Nm
• finely stranded / with core end processing	25 - 70 mm <sup>2</sup> : 31.1 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.0 / 2.0 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	4 AWG
• for copper cable / stranded / maximum	300 kcmil
• for aluminum cable / stranded / minimum	4 AWG
• for aluminum cable / stranded / maximum	300 kcmil
tightening torque / when using copper cables	
• stranded	4 AWG - 300 kcmil: 275 lb-in
Certificates	
General Product Approval	Maritime application



[Confirmation](#)

[Miscellaneous](#)

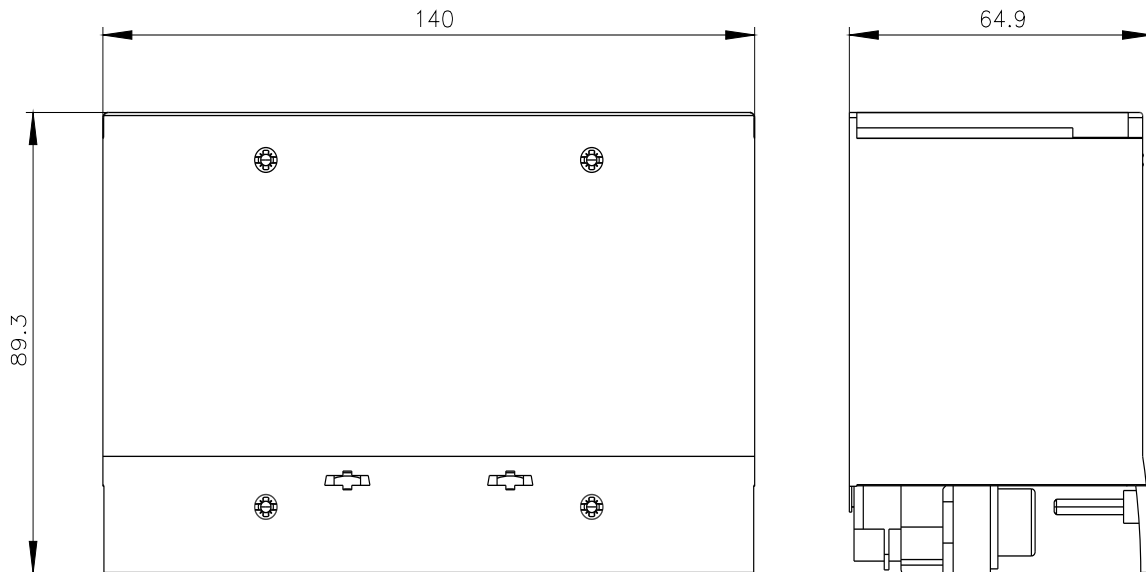

[Confirmation](#)[Environmental Con-  
firmations](#)[Environmental Con-  
firmations](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9214-0JJ22>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VM9214-0JJ22>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VM9214-0JJ22](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9214-0JJ22)**CAX-Online-Generator**<https://www.siemens.com/cax>**Tender specifications**<https://www.siemens.com/specifications>

last modified:

8/8/2025

