


# Product data sheet

Specifications



## TeSys F - star delta starter - 3 x 3P (3 NO) - 225 A - 240 V AC coil

LC3F225U7

⚠ Discontinued

### Main

Range	TeSys
Product name	TeSys F
Product or Component Type	Star delta starter
Device short name	LC3F
Contactor application	Motor control
Utilisation category	AC-3
Device presentation	Pre-wired
Poles description	3 x 3P
power pole contact composition	3 x 3 NO
[Ue] rated operational voltage	Power circuit <= 1000 V AC 16 Hz 2/3...200 Hz
[Ie] rated operational current	225 A (at <131 °F (55 °C)) at <= 440 V AC AC-3 for power circuit
Motor power kW	100 kW 220/230 V AC 50/60 Hz 200 kW 380/400 V AC 50/60 Hz 200 kW 415 V AC 50/60 Hz 220 kW 440 V AC 50/60 Hz
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	240 V AC 50/60 Hz
Auxiliary contact composition	1 NC KM1 star contactor 1 NO KM1 star contactor 2 NC KM2 line contactor 1 NO KM2 line contactor 1 NC KM3 delta contactor 2 NO KM3 delta contactor
[Uimp] rated impulse withstand voltage	8 kV coil not connected to the power circuit
[Ui] rated insulation voltage	1000 V IEC 60947-4-1 1500 V VDE 0110 group C
Interlocking type	Without start delta mechanical interlock
Mounting Support	Plate
Standards	EN 60947-4-1 EN 60947-1 IEC 60947-1 JIS C8201-4-1 IEC 60947-4-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Product Certifications</b>	CSA ABS RINA DNV UL CB CCC RMRoS LROS (Lloyds register of shipping)
-------------------------------	---

## Complementary

<b>[Ith] conventional free air thermal current</b>	315 A 104 °F (40 °C)
<b>Irms rated making capacity</b>	2250 A IEC 60947-4-1
<b>Rated breaking capacity</b>	1800 A conforming to IEC 60947-4-1
<b>[Icw] rated short-time withstand current</b>	1800 A 104 °F (40 °C) - 10 s 1000 A 104 °F (40 °C) - 30 s 850 A 104 °F (40 °C) - 1 min 560 A 104 °F (40 °C) - 3 min 440 A 104 °F (40 °C) - 10 min
<b>Associated fuse rating</b>	315 A gG <= 440 V 250 A aM <= 440 V
<b>Connections - terminals</b>	Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid without cable end Power circuit: bar 2 - busbar cross section: 32 x 4 mm Power circuit: bolted connection Power circuit: lugs-ring terminals 1 0.3 in <sup>2</sup> (185 mm <sup>2</sup> ) Power circuit: connector 1 0.3 in <sup>2</sup> (185 mm <sup>2</sup> )
<b>connections bolt diameter</b>	M10
<b>Tightening torque</b>	Control circuit 10.6 lbf.in (1.2 N.m) Power circuit 309.8 lbf.in (35 N.m)
<b>Operating time</b>	20...35 ms closing 7...15 ms opening
<b>Mechanical durability</b>	10 Mcycles
<b>Maximum operating rate</b>	2400 cyc/h 131 °F (55 °C)
<b>Starting time</b>	20 s
<b>Control circuit voltage limits</b>	Operational: 0.85...1.1 Uc at 50/60 Hz (at <131 °F (55 °C)) Drop-out: 0.35...0.55 Uc at 50/60 Hz (at <131 °F (55 °C))
<b>Inrush power in VA</b>	805 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C)) 970 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C))
<b>Hold-in power consumption in VA</b>	55 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C)) 66 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C))
<b>Heat dissipation</b>	18...24 W
<b>Width</b>	20.7 in (525 mm)
<b>Height</b>	4.3 in (110 mm)
<b>Depth</b>	9.3 in (235 mm)
<b>Net Weight</b>	36.4 lb(US) (16.5 kg)

## Environment

<b>IP degree of protection</b>	IP20 front face with shrouds IEC 60529 IP20 front face with shrouds VDE 0106
<b>Protective treatment</b>	TH
<b>Ambient Air Temperature for Storage</b>	-76...176 °F (-60...80 °C)
<b>Ambient air temperature for operation</b>	23...131 °F (-5...55 °C) -40...158 °F (-40...70 °C) at Uc
<b>Operating altitude</b>	9842.52 ft (3000 m) without derating
<b>Mechanical robustness</b>	Vibrations contactor open2 Gn, 5...300 Hz Shocks contactor closed15 Gn for 11 ms Vibrations contactor closed5 Gn, 5...300 Hz Shocks contactor open7 Gn for 11 ms

## Ordering and shipping details

<b>Category</b>	18401-WORLD SERVICE PARTS(CTR ACCESS)
<b>Discount Schedule</b>	CP10
<b>GTIN</b>	3389110460407
<b>Returnability</b>	No

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Longer



#### Lifetime extension

Repair

No

### Use Again



#### Repack and remanufacture

WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.



Dimensions Drawings

Dimensions and Drawings

Chassis mounted starters

Pre-assembled: LC3 F185 to LC3 F400

For customer assembly: 2 x LC1 F●●● and 1 x LC1 D150 or 3 x LC1 F●●●

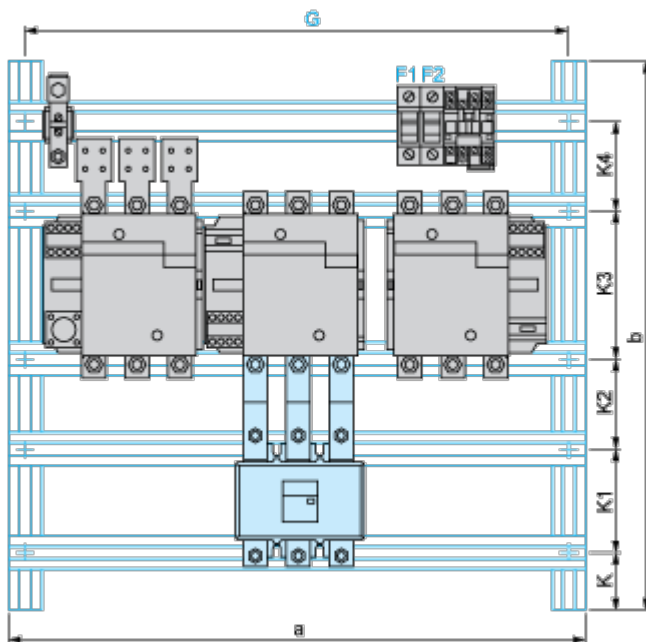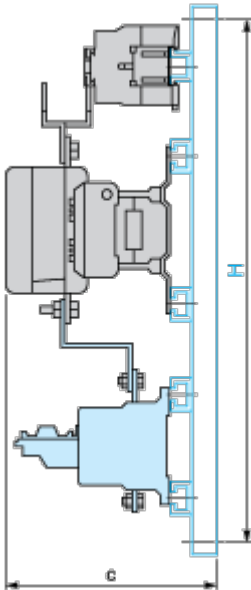

	a	b	c	G	H	K	K1	K2	K3	K4
LC3 F185 or 2 x LC1 F●●● + 1 x LC1 D with components F185	565	675	235	525	625	160	110	80	110	80
LC3 F225 or 3 x LC1 F●●● with components F225	565	675	235	525	625	160	110	80	110	80

	a	b	c	G	H	K	K1	K2	K3	K4
LC3 F265 or 3 x LC1 F●●● with components F265	665	775	266	625	725	165	110	100	110	110
LC3 F330 or 3 x LC1 F●●● with components F330	765	975	276	725	825	195	140	100	110	180
LC3 F400 or 3 x LC1 F●●● with components F400	765	975	276	725	925	195	140	100	180	110