

Product datasheet

Specifications



automatic transfer switch,
TransferPacT, 800A, 400V, 3P,
rotary, frame 800A

TA80D3S8004TPE

Price: 104,165.08 ZAR

Main

Range of product	TransferPacT
Product or component type	Automatic transfer switch
Device application	Change source of supply
Poles description	3P
Network type	AC
Network frequency	50/60 Hz
Downside connection	Screwed
Mounting mode	Fixed
Upside connection	Screwed
Contact position indicator	Yes
[Icm] rated short-circuit making capacity	40 kA switch-disconnector alone 400 V AC at 50 Hz 330 kA with upstream protection circuit breaker 400 V AC at 50 Hz
Suitability for isolation	Yes

Complementary

Transfer switch class	PC
Number of contact position	3
Signal contacts composition	1 NO + 2 NC 1 NC + 2 NO 2 NO
Utilization category	AC-33B
[Ue] rated operational voltage	400 V AC 50/60 Hz
Control type	Rotary knob Selector switch
Operating mode	Automatic Manual
Mounting support	Plate
Locking options description	Padlock in OFF position Padlock in SI / SII position
Rated duty	Uninterrupted
[Ui] rated insulation voltage	Switch: 1000 V Controller: 500 V
[Uimp] rated impulse withstand voltage	Switch: 12 kV Controller: 6 kV
[Ie] rated operational current	800 A

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Mechanical interlocking	With mechanical interlocking
Mechanical durability	10000 cycles
Connection pitch	45 mm
[Icw] rated short-time withstand current	20 kA during 0.5 s 25 kA during 0.1 s
Height	341 mm
Width	467 mm
Depth	186 mm
Net weight	22.4 kg
[Ith] conventional free air thermal current	800 A at 60 °C

Environment

Standards	IEC 60947-6-1
Product certifications	CCC CE CB
IP degree of protection	Front face: IP40 auto mode Inside the enclosure: IP20 manual mode
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C
Pollution degree	3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	73.000 cm
Package 1 Width	60.000 cm
Package 1 Length	80.000 cm
Package 1 Weight	36.988 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	6 315 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	151 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	8 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	6 107 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	49 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
SCIP Number	C3983c66-b0d8-4e89-97bd-6283c5c8cdd7
REACH Regulation	REACH Declaration

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	77
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Dimensions

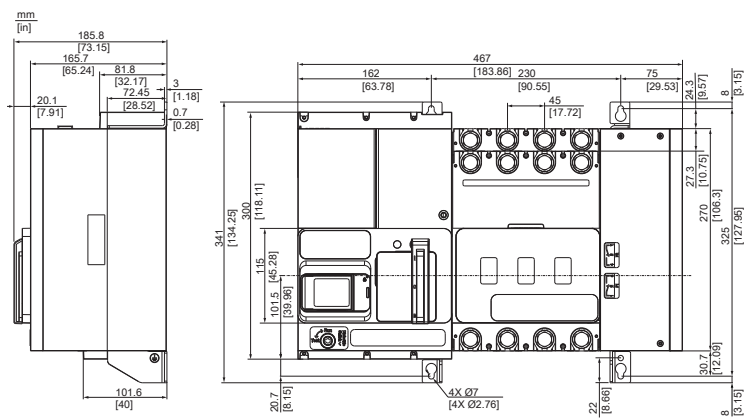

Technical Illustration

Assembly exploded view

