



Figure similar

POSITION SWITCH MOUL. PLASTIC-SEALED, 1XM20X1.5 SNAP-ACTION CONTACTS 1NO+1NC ROUNDED PLUNGER FORM B WITH CHLORINATED RUBBER MEMB.

product designation	position switch
suitability for use safety switch	Yes
General technical data	
protection class IP	IP67
reference code according to IEC 81346-2	B
active principle	mechanical
Substance Prohibittance (day/month/year)	07/01/2006
Net Weight	0.06 kg
length of the sensor	70.5 mm
width of the sensor	31 mm
Ambient conditions	
ambient temperature	
• during operation	-30 ... +85 °C
explosion protection category for dust	none
design of the switching contact	mechanical
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
Enclosure	
design of the housing	design complying with EN 50047
material of the enclosure	glass fiber reinforced thermoplast
coating of the enclosure	Other types
design of the housing according to standard	Yes
Drive Head	
design of the actuating element	rounded plunger
standard-compliant actuator head	EN 50047, design B
shape of the switch head	rounded
outer diameter of the switch head	6 mm
design of the switching function	positive opening
circuit principle	snap-action contacts
number of switching contacts safety-related	1
Installation/ mounting/ dimensions	
fastening method	screw fixing
Connections/ Terminals	
type of electrical connection	screw terminal
design of the interface for safety-related communication	without
Communication/ Protocol	
design of the interface	without
Approvals Certificates	



[Miscellaneous](#)



[Confirmation](#)

[Confirmation](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE2200-1CV00-0AH0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE2200-1CV00-0AH0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE2200-1CV00-0AH0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE2200-1CV00-0AH0&lang=en

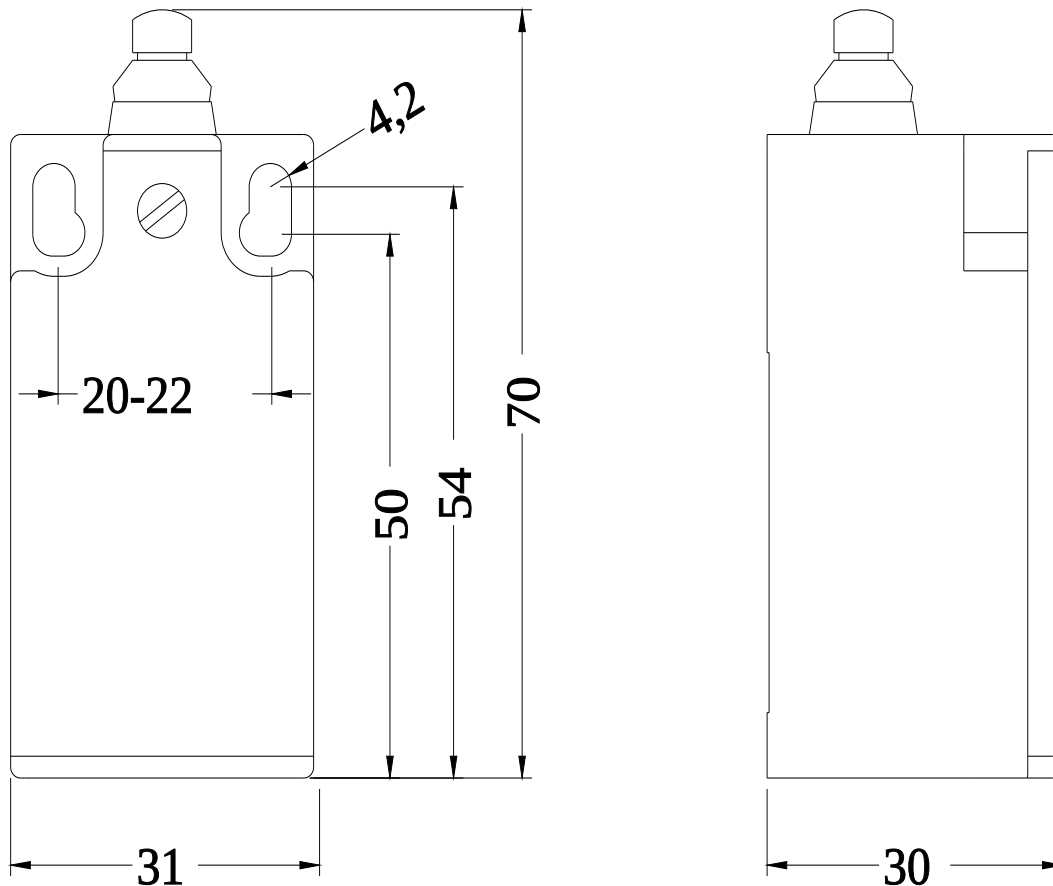

last modified:

8/8/2025