

Product data sheet

Specifications



voltage measurement relay RM4-U - range 1..100 V - 24 V AC

RM4UA02B

⚠ Discontinued on: Dec 31, 2016

⚠ Discontinued

Main

Range of product	Harmony Relay
Relay type	Voltage measurement relay
Product or component type	Industrial measurement and control relays
Relay name	RM4U
Relay monitored parameters	Overvoltage or undervoltage detection
time delay	Without
Contacts type and composition	1 C/O

Complementary

Maximum switching voltage	440 V AC
operating voltage tolerance	0.85...1.1 Uc
Power consumption in VA	2 VA AC
Output contacts	1 C/O
Hysteresis	5...30 % adjustable voltage threshold setting
Internal input resistance	23000 Ohm 112000 Ohm 225000 Ohm
Permissible continuous overload	150 V 90 V 300 V
Permissible non repetitive overload	100 A <= 1 s 200 A <= 1 s 400 A <= 1 s
Switching threshold drift	<= 0.06 % per degree centigrade depending permissible ambient air temperature <= 0.5 % within the supply voltage range (0.85...1.1 Un)
Setting accuracy of time delay	10 P
Quality labels	CE
Setting accuracy of the switching threshold	+/-5 %
Operating position	Any position without derating
Overvoltage category	III conforming to IEC 60664-1
[UI] rated insulation voltage	500 V IEC
Supply disconnection value	> 0.1 Uc
Connections - terminals	Screw terminals, 2 x 1.5 mm²flexible with cable end Screw terminals, 2 x 2.5 mm²flexible without cable end

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ie] rated operational current	2 A 158 °F (70 °C) 24 V DC-13 IEC 60947-5-1/1991 2 A 158 °F (70 °C) 24 V DC-13 VDE 0660 3 A 158 °F (70 °C) 115 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 115 V AC-15 VDE 0660 3 A 158 °F (70 °C) 24 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 24 V AC-15 VDE 0660 3 A 158 °F (70 °C) 250 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 250 V AC-15 VDE 0660 0.1 A 158 °F (70 °C) 250 V DC-13 IEC 60947-5-1/1991 0.1 A 158 °F (70 °C) 250 V DC-13 VDE 0660 0.3 A 158 °F (70 °C) 115 V DC-13 IEC 60947-5-1/1991 0.3 A 158 °F (70 °C) 115 V DC-13 VDE 0660
Tightening torque	5.3...9.7 lbf.in (0.6...1.1 N.m)
Mechanical durability	30000000 cycles
[Ith] conventional free air thermal current	8 A
Switching capacity in mA	10 mA 12 V
Contacts material	90/10 silver nickel contacts
Number of cables	2
Width	0.9 in (22.5 mm)
Height	3.07 in (78 mm)
Depth	3.1 in (80 mm)
Terminals description ISO n°1	(15-16-18)OC (A1-A2)CO (C-B1-B2-B3)CO
Output relay state	Tripped if A measured > A set
9 mm pitches	2.5
Net weight	0.370 lb(US) (0.168 kg)

Environment

Electromagnetic compatibility	Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2
Ambient air temperature for operation	-4...149 °F (-20...65 °C)
Vibration resistance	0.35 ms (f= 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn 11 ms IEC 60068-2-27
Standards	EN/IEC 60255-6
Product certifications	GL UL CSA
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	15...85 % 3K3 IEC 60721-3-3
IP degree of protection	IP20 IEC 60529 terminals) IP50 IEC 60529 casing)
Pollution degree	3 IEC 60664-1
Directives	73/23/EEC - low voltage directive 89/336/EEC - electromagnetic compatibility
Resistance to electrostatic discharge	6 kV contact IEC 61000-4-2 level 3 8 kV air IEC 61000-4-2 level 3
Resistance to electromagnetic fields	9.1 V/yd (10 V/m) IEC 61000-4-3 level 3
Resistance to fast transients	2 kV IEC 61000-4-4 level 3

Protection against electric shocks	2 kV level 3 IEC 61000-4-5
Disturbance radiated/conducted	CISPR 22 - class A CISPR 11 group 1 - class A
Dielectric test voltage	2.5 kV
Non-dissipating shock wave	4.8 kV

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.06 in (2.7 cm)
Package 1 Width	3.2 in (8.2 cm)
Package 1 Length	3.3 in (8.5 cm)
Package 1 Weight	6.5 oz (185 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Voltage Measurement Relays


Dimensions

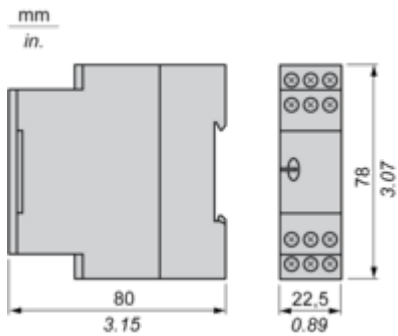


Mounting and Clearance

Voltage Measurement Relays

Rail mounting

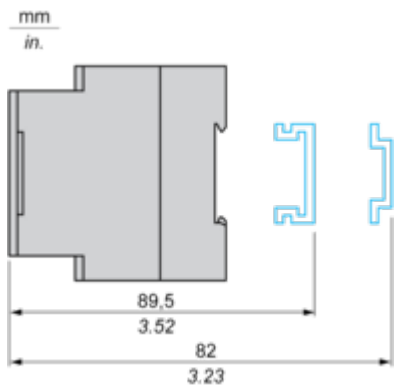


Screw fixing

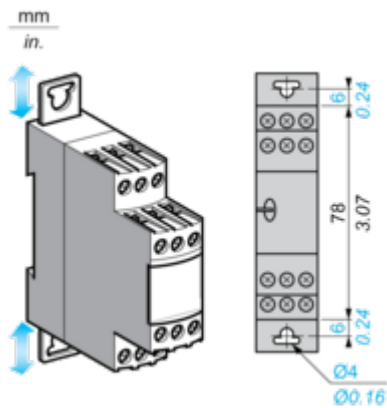

Connections and Schema

Voltage Measurement Relays


RM4UA01 and RM4UA02 Wiring Diagram



A1-A2 Supply voltage
B1, B2, B3, C Voltages to be measured (see table below)

Connection and current values to be measured		
RM4UA•1	B1-C	0.05...0.5 V
	B2-C	0.3...3 V
	B3-C	0.5...5 V
RM4UA•2	B1-C	1...10 V
	B2-C	5...50 V
	B3-C	10...100 V


RM4UA03 Wiring Diagram



A1-A2 Supply voltage
B2, B3, C Voltages to be measured (see table below)

Connection and current values to be measured	
B2-C	30...300 V
B3-C	50...500 V


RM4UA31 and RM4UA32 Wiring Diagram



A1-A2 Supply voltage
B1, B2, B3, C Voltages to be measured (see table below)

Connection and current values to be measured		
RM4UA•1	B1-C	0.05...0.5 V
	B2-C	0.3...3 V
	B3-C	0.5...5 V
RM4UA•2	B1-C	1...10 V
	B2-C	5...50 V
	B3-C	10...100 V

RM4UA33 Wiring Diagram




A1-A2 Supply voltage
B2, B3, C Voltages to be measured (see table below)

Connection and current values to be measured	
B2-C	30...300 V
B3-C	50...500 V

Voltage Measurement Relays

Application Scheme

Example: overspeed monitoring (undervoltage function)

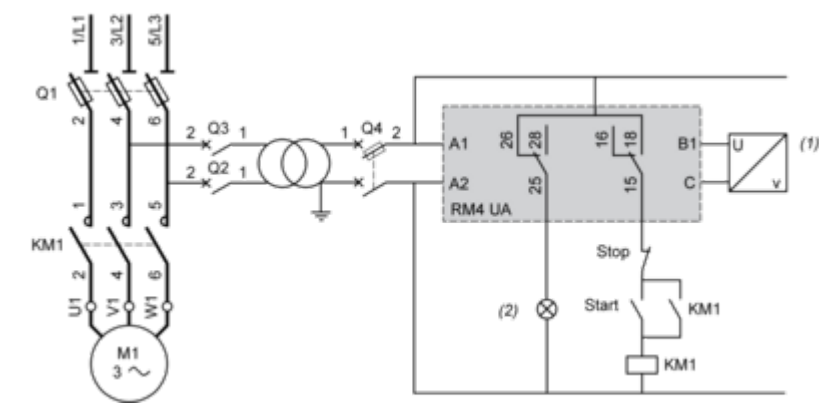


- (1) Tachogenerator
- (2) Overspeed

Performance Curves

Electrical Durability and Load Limit Curves

AC Load


Curve 1: Electrical durability of contacts on resistive load in millions of operating cycles

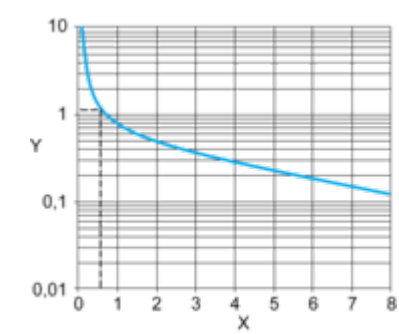

X Current broken in A

Y Millions of operating cycles

Curve 2: Reduction factor k for inductive loads (applies to values taken from durability Curve 1)

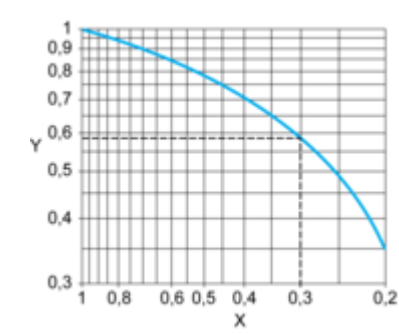


X Power factor on breaking (cos φ)

Y Reduction factor K

DC Load

Load limit curve

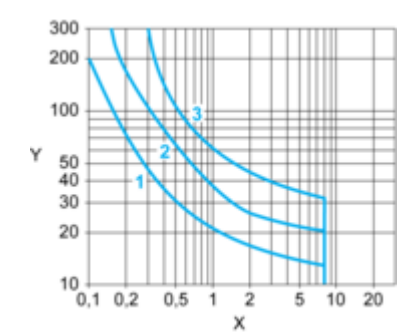


X Current in A

Y Voltage in V

1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load




Technical Description

Function Diagram

Overvoltage Control

Function “>”

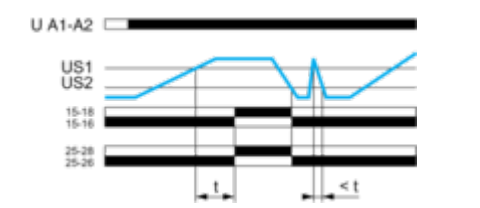

Legend

- t Time delay
- U A1-A2 Supply voltage
- US1 Setting voltage threshold
- US2 Voltage measured
- 15-18, 15-16; 25-28, 25-26 Output relays connections
- Relay status: black color = energized.