

Product datasheet

Specifications



miniature plug-in relay - Harmony RXM2L - 4 C/O - 12 V DC - 3 A - without LED

RXM4LB1JD

Main

Range of product	Harmony Electromechanical Relays
Series name	RXM series
Product or component type	Plug-in relay
Relay type	Miniature relay
Contacts type and composition	4 C/O
[Uc] control circuit voltage	12 V DC
[Ithe] conventional enclosed thermal current	3 A at -40...55 °C

Complementary

status LED	Without
Control type	Without lockable test button
[Ie] rated operational current	1.5 A at 28 V (DC) NC conforming to IEC 1.5 A at 250 V (AC) NC conforming to IEC 3 A at 28 V (DC) NO conforming to IEC 3 A at 250 V (AC) NO conforming to IEC 3 A at 24 V (DC) NO conforming to IEC 3 A at 220 V (AC) NO conforming to IEC 3 A at 28 V (DC) conforming to UL 3 A at 250 V (AC) conforming to UL
Minimum switching capacity	25 mW subject to switching frequency, environment or expected reliability level etc
Rated operational voltage limits	9.6...13.2 V DC
[Ui] rated insulation voltage	250 V conforming to IEC
Maximum switching voltage	250 V AC 28 V DC
Drop-out voltage threshold	$\geq 0.1 U_c$ DC
Load current	3 A at 250 V AC 3 A at 28 V DC
Maximum switching capacity	750 VA AC 84 W DC
Compatibility code	RXM
Minimum switching current	5 mA subject to switching frequency, environment or expected reliability level etc
Minimum switching voltage	5 V subject to switching frequency, environment or expected reliability level etc
Average resistance	160 Ohm at 23 °C +/- 10 %
Average coil consumption	0.9 W, DC
Mechanical durability	20000000 cycles
Electrical durability	200000 cycles resistive load 23 °C 100000 cycles resistive load at 55 °C

Excluding VAT, FCA Jabal Ali & amp; are subject to change – check with your local distributor.

Safety reliability data	B10d = 100000
Operating rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Utilisation coefficient	20 %
Dielectric strength	2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection
Protection category	RT I
Pollution degree	2
Operating position	Any position
Test levels	Level A group mounting
Sale per indivisible quantity	10
Contacts material	Silver alloy (Ag/Ni)
Shape of pin	Flat (faston type)
Net weight	0.034 kg

Environment

Standards	IEC 61810-1 (iss. 2) CE UL 508
Ambient air temperature for storage	-40...85 °C
Vibration resistance	3 gn, amplitude = +/- 1 mm (f = 10...50 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 10...50 Hz)not operating conforming to IEC 60068-2-6
Shock resistance	30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.700 cm
Package 1 Width	2.100 cm
Package 1 Length	4.500 cm
Package 1 Weight	34.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3.000 cm
Package 2 Width	10.200 cm
Package 2 Length	12.500 cm
Package 2 Weight	371.000 g
Unit Type of Package 3	S02
Number of Units in Package 3	270
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm

Package 3 Weight 10.316 kg

Contractual warranty

Warranty (in months) 18



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	13 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	12 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture


End of life manual availability	End of Life Information
Take-back	Nej
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

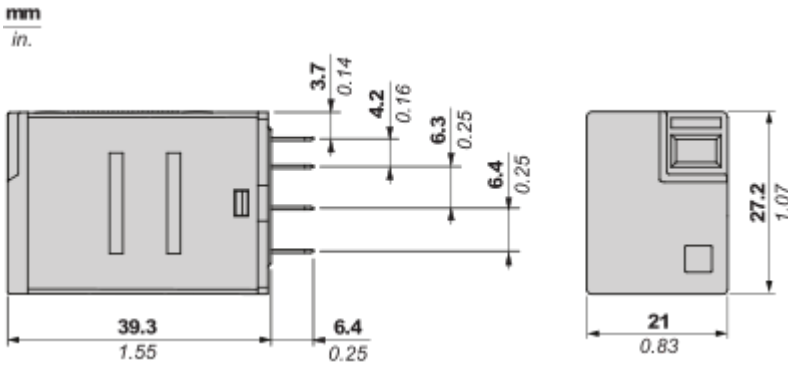

Pin Side View

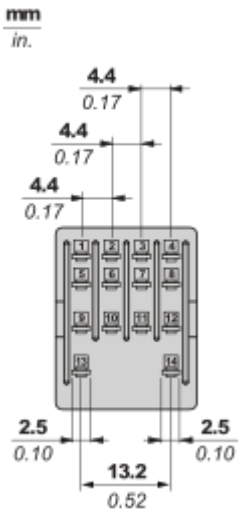

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 4 Poles Relay

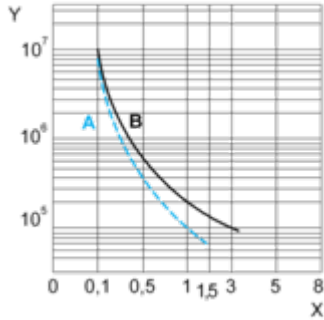

X : Contact current (A)

Y : Durability (Number of operating cycles)

A : Inductive load


B : Resistive load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

Maximum Switching Capacity

For 4 Poles Relay

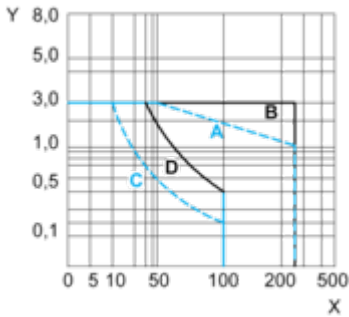

X : Contact voltage (v)

Y : Contact current (A)

A : Inductive AC load

B : Resistive AC load

C : Inductive DC load

D : Resistive DC load


Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

For low level loads (below 10mA), we recommend to use RXM*GB series with bifurcated contacts relays instead.

Technical Illustration

Dimensions

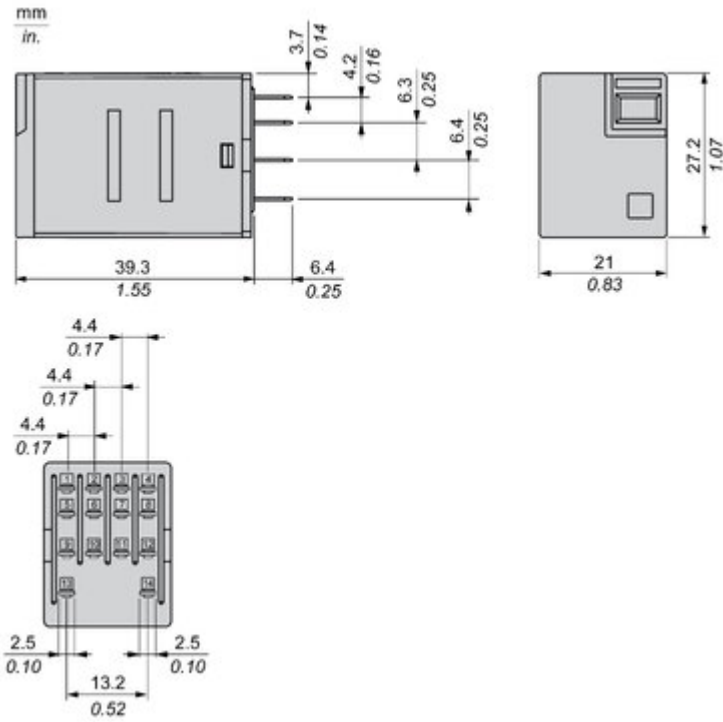

Offer Marketing Illustration

Product benefits / Features



The graphic features a central image of a black RXMLB relay against a green background. The word "Features" is written in white at the top, with "Easy Harmony RXMLB Relay" below it. Four white circular icons are arranged around the relay, each with a corresponding text block describing a feature.

Features

Easy Harmony RXMLB Relay

- Fit to customer needs**
coverage of most general control panel applications
- Easy to select**
simple selection and wide availability
- Convenient to use**
Easy status readiness through mechanical indicator & LED
- Safe to perform**
product reliability, compliance with industrial standard and eco-design

Offer Marketing Illustration

Product benefits / Features

Technical Benefits


Easy Harmony RXMLB Relay

RXM*LB sockets:

- Mixed contact arrangement
- Screw clamp terminal

Metal maintaining clamp:
reliable in vibration
environment

Finger grip cover to
easily remove relay
from socket

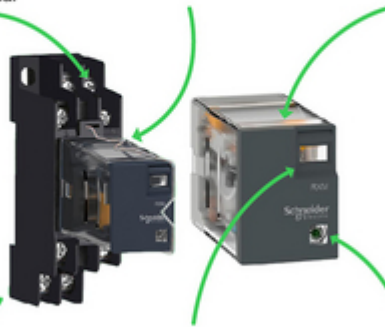

RXM*LB sockets:

- 2CO-5A, 4CO-3A
- 12-110VDC, 24-230VAC

Mechanical indicator
for contact status

"Power On" LED for
relays status

Image of product / Alternate images

Alternative

