



Figure similar

TIMING RELAY,SET UP STAR-DELTA (WYE-DELTA, Phased-out product !!! FOR FURTHER INFO CONTACT OUR SALES DEPARTMENT 1 S DEL., 1 S UNVERS., 20S RUN TIME, 0MS PAUSE TIME 24 V AC/DC and AC 100...127V, FOR AC 50/60 Hz

|                                                                                                               |                                              |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| product brand name                                                                                            | SIRIUS                                       |
| product designation                                                                                           | timing relay                                 |
| product type designation                                                                                      | 3RP15                                        |
| <b>General technical data</b>                                                                                 |                                              |
| product feature protective coating on printed-circuit board                                                   | No                                           |
| product component                                                                                             |                                              |
| • relay output                                                                                                | Yes                                          |
| • semi-conductor output                                                                                       | No                                           |
| product extension required remote control                                                                     | No                                           |
| product extension optional remote control                                                                     | No                                           |
| power loss [W] maximum                                                                                        | 2 W                                          |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V                                        |
| test voltage for isolation test                                                                               | 2 kV                                         |
| degree of pollution                                                                                           | 3                                            |
| surge voltage resistance rated value                                                                          | 4 000 V                                      |
| shock resistance according to IEC 60068-2-27                                                                  | 11 g / 15 ms                                 |
| vibration resistance according to IEC 60068-2-6                                                               | 10 ... 55 Hz / 0.35 mm                       |
| mechanical service life (operating cycles) typical                                                            | 10 000 000                                   |
| electrical endurance (operating cycles) at AC-15 at 230 V typical                                             | 100 000                                      |
| adjustable time                                                                                               | 1 ... 20 s                                   |
| relative setting accuracy relating to full-scale value                                                        | 5 %                                          |
| thermal current                                                                                               | 5 A                                          |
| recovery time                                                                                                 | 150 ms                                       |
| reference code according to IEC 81346-2                                                                       | K                                            |
| relative repeat accuracy                                                                                      | 1 %                                          |
| influence of the surrounding temperature                                                                      | ±5 %                                         |
| power supply influence                                                                                        | ±1 %                                         |
| Substance Prohibitance (day/month/year)                                                                       | 05/01/2012                                   |
| SVHC substance name                                                                                           | Lead monoxide (lead oxide) CAS-No. 1317-36-8 |
| Net Weight                                                                                                    | 0.115 kg                                     |
| <b>Control circuit/ Control</b>                                                                               |                                              |
| type of voltage of the control supply voltage                                                                 | AC/DC                                        |
| control supply voltage at AC                                                                                  |                                              |
| • at 50 Hz rated value                                                                                        | 24 V                                         |
| • at 60 Hz rated value                                                                                        | 24 V                                         |
| control supply voltage 1 at AC                                                                                |                                              |
| • at 50 Hz rated value                                                                                        | 24 V                                         |

|                                                                                                                            |                 |
|----------------------------------------------------------------------------------------------------------------------------|-----------------|
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>                                                   | 24 V            |
| <b>control supply voltage 2 at AC</b>                                                                                      |                 |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                               | 100 ... 127 V   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                                               | 100 ... 127 V   |
| <b>control supply voltage frequency 1</b>                                                                                  | 50 ... 60 Hz    |
| <b>control supply voltage at DC rated value</b>                                                                            | 24 V            |
| <b>control supply voltage 1 at DC rated value</b>                                                                          | 24 V            |
| <b>operating range factor control supply voltage rated value at DC</b>                                                     |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>                                                          | 0.85            |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>                                                       | 1.1             |
| <b>operating range factor control supply voltage rated value at AC at 50 Hz</b>                                            |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>                                                          | 0.85            |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>                                                       | 1.1             |
| <b>operating range factor control supply voltage rated value at AC at 60 Hz</b>                                            |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>                                                          | 0.85            |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>                                                       | 1.1             |
| <b>Switching Function</b>                                                                                                  |                 |
| <b>switching function</b>                                                                                                  |                 |
| <ul style="list-style-type: none"> <li>• ON-delay</li> </ul>                                                               | No              |
| <ul style="list-style-type: none"> <li>• ON-delay/instantaneous contact</li> </ul>                                         | No              |
| <ul style="list-style-type: none"> <li>• passing make contact</li> </ul>                                                   | No              |
| <ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>                             | No              |
| <ul style="list-style-type: none"> <li>• OFF delay</li> </ul>                                                              | No              |
| <b>switching function</b>                                                                                                  |                 |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with interval start/instantaneous</li> </ul>               | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with interval start</li> </ul>                             | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start/instantaneous</li> </ul>                  | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start</li> </ul>                                | No              |
| <ul style="list-style-type: none"> <li>• flashing asymmetrically with interval start</li> </ul>                            | No              |
| <ul style="list-style-type: none"> <li>• flashing asymmetrically with pulse start</li> </ul>                               | No              |
| <b>switching function</b>                                                                                                  |                 |
| <ul style="list-style-type: none"> <li>• star-delta circuit with delay time</li> </ul>                                     | No              |
| <ul style="list-style-type: none"> <li>• star-delta circuit</li> </ul>                                                     | Yes             |
| <b>switching function with control signal</b>                                                                              |                 |
| <ul style="list-style-type: none"> <li>• additive ON-delay</li> </ul>                                                      | No              |
| <ul style="list-style-type: none"> <li>• passing break contact</li> </ul>                                                  | No              |
| <ul style="list-style-type: none"> <li>• passing break contact/instantaneous</li> </ul>                                    | No              |
| <ul style="list-style-type: none"> <li>• OFF delay</li> </ul>                                                              | No              |
| <ul style="list-style-type: none"> <li>• OFF delay/instantaneous</li> </ul>                                                | No              |
| <ul style="list-style-type: none"> <li>• pulse delayed</li> </ul>                                                          | No              |
| <ul style="list-style-type: none"> <li>• pulse delayed/instantaneous</li> </ul>                                            | No              |
| <ul style="list-style-type: none"> <li>• pulse-shaping</li> </ul>                                                          | No              |
| <ul style="list-style-type: none"> <li>• pulse-shaping/instantaneous</li> </ul>                                            | No              |
| <ul style="list-style-type: none"> <li>• additive ON-delay/instantaneous</li> </ul>                                        | No              |
| <ul style="list-style-type: none"> <li>• ON-delay/OFF-delay/instantaneous</li> </ul>                                       | No              |
| <ul style="list-style-type: none"> <li>• passing make contact</li> </ul>                                                   | No              |
| <ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>                             | No              |
| <b>switching function of interval relay with control signal</b>                                                            |                 |
| <ul style="list-style-type: none"> <li>• retrotriggerable with deactivated control signal/instantaneous contact</li> </ul> | No              |
| <ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal</li> </ul>                       | No              |
| <ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal/instantaneous contact</li> </ul> | No              |
| <ul style="list-style-type: none"> <li>• retriggerable with deactivated control signal</li> </ul>                          | No              |
| <b>Short-circuit protection</b>                                                                                            |                 |
| design of the fuse link for short-circuit protection of the auxiliary switch required                                      | fuse gL/gG: 4 A |

|                                                                               |                                                                                    |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Auxiliary circuit</b>                                                      |                                                                                    |
| <b>material of switching contacts</b>                                         | AgSnO2                                                                             |
| <b>number of NC contacts</b>                                                  |                                                                                    |
| • delayed switching                                                           | 0                                                                                  |
| • instantaneous contact                                                       | 0                                                                                  |
| <b>number of NO contacts</b>                                                  |                                                                                    |
| • delayed switching                                                           | 1                                                                                  |
| • instantaneous contact                                                       | 1                                                                                  |
| <b>number of CO contacts</b>                                                  |                                                                                    |
| • delayed switching                                                           | 0                                                                                  |
| • instantaneous contact                                                       | 0                                                                                  |
| <b>operational current of auxiliary contacts at AC-15</b>                     |                                                                                    |
| • at 24 V                                                                     | 3 A                                                                                |
| • at 250 V                                                                    | 3 A                                                                                |
| <b>operational current of auxiliary contacts at DC-13</b>                     |                                                                                    |
| • at 24 V                                                                     | 1 A                                                                                |
| • at 125 V                                                                    | 0.2 A                                                                              |
| • at 250 V                                                                    | 0.1 A                                                                              |
| <b>operating frequency with 3RT2 contactor maximum</b>                        | 5 000 1/h                                                                          |
| <b>contact reliability of auxiliary contacts</b>                              | one incorrect switching operation of 100 million switching operations (17 V, 5 mA) |
| <b>contact rating of auxiliary contacts according to UL</b>                   | R300 / B300                                                                        |
| <b>Inputs/ Outputs</b>                                                        |                                                                                    |
| <b>product function</b>                                                       |                                                                                    |
| • non-volatile                                                                | No                                                                                 |
| <b>Electromagnetic compatibility</b>                                          |                                                                                    |
| EMC emitted interference according to IEC 61812-1                             | EN 61000-6-4(3)                                                                    |
| EMC immunity according to IEC 61812-1                                         | EN 61000-6-2                                                                       |
| <b>conducted interference</b>                                                 |                                                                                    |
| • due to burst according to IEC 61000-4-4                                     | 2 kV network connection / 1 kV control connection                                  |
| • due to conductor-earth surge according to IEC 61000-4-5                     | 2 kV                                                                               |
| • due to conductor-conductor surge according to IEC 61000-4-5                 | 1 kV                                                                               |
| <b>field-based interference according to IEC 61000-4-3</b>                    | 10 V/m                                                                             |
| <b>electrostatic discharge according to IEC 61000-4-2</b>                     | 4 kV contact discharge / 8 kV air discharge                                        |
| <b>Safety related data</b>                                                    |                                                                                    |
| category according to EN 954-1                                                | none                                                                               |
| <b>Electrical Safety</b>                                                      |                                                                                    |
| <b>protection class IP on the front according to IEC 60529</b>                | IP20                                                                               |
| <b>type of insulation</b>                                                     | Basic insulation                                                                   |
| <b>Connections/ Terminals</b>                                                 |                                                                                    |
| <b>product component removable terminal for auxiliary and control circuit</b> | Yes                                                                                |
| <b>type of electrical connection</b>                                          |                                                                                    |
| • for auxiliary and control circuit                                           | screw-type terminals                                                               |
| <b>type of connectable conductor cross-sections</b>                           |                                                                                    |
| • solid                                                                       | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )                 |
| • finely stranded with core end processing                                    | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )               |
| • for AWG cables solid                                                        | 2x (20 ... 14)                                                                     |
| • for AWG cables stranded                                                     | 2x (20 ... 14)                                                                     |
| <b>connectable conductor cross-section</b>                                    |                                                                                    |
| • solid                                                                       | 0.5 ... 4 mm <sup>2</sup>                                                          |
| • finely stranded with core end processing                                    | 0.5 ... 2.5 mm <sup>2</sup>                                                        |
| <b>AWG number as coded connectable conductor cross section</b>                |                                                                                    |
| • solid                                                                       | 20 ... 14                                                                          |
| • stranded                                                                    | 20 ... 14                                                                          |
| <b>tightening torque</b>                                                      | 0.8 ... 1.2 N·m                                                                    |
| <b>design of the thread of the connection screw</b>                           | M3                                                                                 |
| <b>Installation/ mounting/ dimensions</b>                                     |                                                                                    |

|                              |                                                |
|------------------------------|------------------------------------------------|
| mounting position            | any                                            |
| fastening method             | screw and snap-on mounting onto 35 mm DIN rail |
| height                       | 84 mm                                          |
| width                        | 22.5 mm                                        |
| depth                        | 91 mm                                          |
| required spacing             |                                                |
| • with side-by-side mounting |                                                |
| — forwards                   | 0 mm                                           |
| — backwards                  | 0 mm                                           |
| — upwards                    | 0 mm                                           |
| — downwards                  | 0 mm                                           |
| — at the side                | 0 mm                                           |
| • for grounded parts         |                                                |
| — forwards                   | 0 mm                                           |
| — backwards                  | 0 mm                                           |
| — upwards                    | 0 mm                                           |
| — at the side                | 0 mm                                           |
| — downwards                  | 0 mm                                           |
| • for live parts             |                                                |
| — forwards                   | 0 mm                                           |
| — backwards                  | 0 mm                                           |
| — upwards                    | 0 mm                                           |
| — downwards                  | 0 mm                                           |
| — at the side                | 0 mm                                           |

|                                                         |                |
|---------------------------------------------------------|----------------|
| <b>Ambient conditions</b>                               |                |
| installation altitude at height above sea level maximum | 2 000 m        |
| ambient temperature                                     |                |
| • during operation                                      | -25 ... +60 °C |
| • during storage                                        | -40 ... +85 °C |
| • during transport                                      | -40 ... +85 °C |
| relative humidity during operation                      | 10 ... 95 %    |

|                               |                          |
|-------------------------------|--------------------------|
| <b>Approvals Certificates</b> |                          |
| Environment                   | General Product Approval |

[Environmental Con-  
firmations](#)



|     |                      |       |
|-----|----------------------|-------|
| EMV | Maritime application | other |
|-----|----------------------|-------|



[Confirmation](#)



[Miscellaneous](#)

|                |
|----------------|
| <b>Railway</b> |
|----------------|

[Special Test Certific-  
ate](#)

|                            |
|----------------------------|
| <b>Further information</b> |
|----------------------------|

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP1578-1NQ38-0AB1>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP1578-1NQ38-0AB1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP1578-1NQ38-0AB1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RP1578-1NQ38-0AB1&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP1578-1NQ38-0AB1&lang=en)

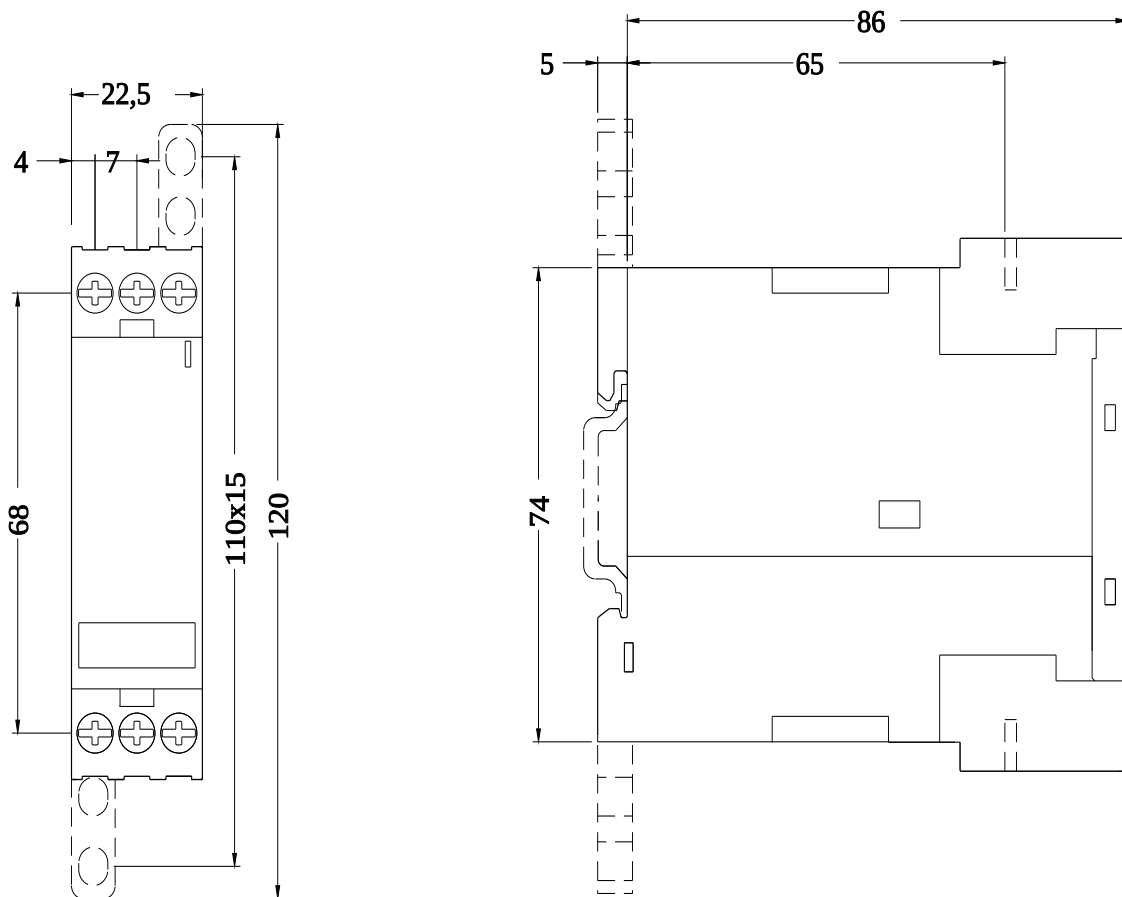

last modified:

5/29/2026 