

Product data sheet

Specifications



Power relay, SE Relays, DPDT, 25A, 240 VAC, plug-in socket cover

389FXBXC-240A

⚠ Discontinued on: Oct 22, 2024

⚠ Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product Type	Power relay
Switch Function	DPDT
Contact Composition	2 NC + 2 NO

Complementary

Input Current	25 A
Short Circuit Current	3 kA
Associated Fuse Rating	32 A gG at 400 V coordination type 2 for power circuit
Average Pole Impedance	4 mOhm
Contacts Material	Silver alloy contacts
Wire Strip Length	0.3 in (8 mm)
Minimum Switching Current	100 mA 5 V DC
Coil Resistance	7200 Ohm
Input voltage	240 V AC
Drop-out Voltage Threshold	$\geq 0.1 U_c$ AC/DC
Rated Operational Current	25 A at 300 V AC (on resistive load) conforming to UL 5 A at 600 V AC (on resistive load) conforming to UL 13 A at 28 V DC (on resistive load) conforming to UL 22 A at 120 V AC (full load) conforming to UL 20 A at 277 V AC (ballast) conforming to IEC 25 A at 250 V AC-1 (NO/NC) conforming to IEC 15 A at 28 V DC-1 (NO/NC)
Power consumption in W	1.3 W DC
Power consumption in VA	2 VA AC
Voltage Range	0.85...1.1 U_c AC
Maximum Switching Voltage	600 V AC
Motor Power HP	1.5 hp 200/240 V AC 50/60 Hz 1 hp 120...200V AC 50/60 Hz 1 hp 600 V AC 50/60 Hz
Connections Terminals	Quick
Mounting	Socket
Product Weight	3.0 oz (84 g)

Environment

Ambient Air Temperature for Operation	-22...131 °F (-30...55 °C)
---------------------------------------	----------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Storage	-22...185 °F (-30...85 °C)
Product Certifications	cURus CSA CE
Electrical Durability	100000 cycles resistive load 50000 cycles resistive DC load
Mechanical Durability	5000000 cycles
IP Degree of Protection	IP40
Dielectric Strength	2200 V AC between coil and contact 2200 V AC between poles 1600 V AC between contacts

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480276873
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.36 in (3.45 cm)
Package 1 Width	1.49 in (3.78 cm)
Package 1 Length	2.25 in (5.71 cm)
Package weight(Lbs)	3.0 oz (84 g)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	35 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	0.5 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	34 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.2 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again





Repack and remanufacture

Recyclability potential, in %	66
Circularity Profile	End of Life Information

Connections and Schema

Connections and Wiring Diagrams

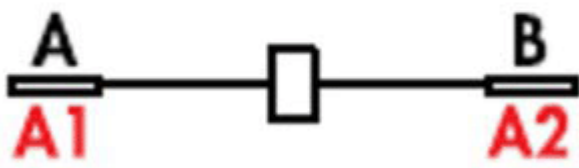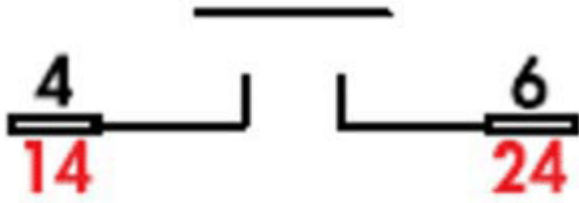

SPST-NO-(DM)

Connections and Wiring Diagrams

