


# Electronic timer CT-MXS.22

## Multifunctional with 2 c/o contacts

### Data sheet

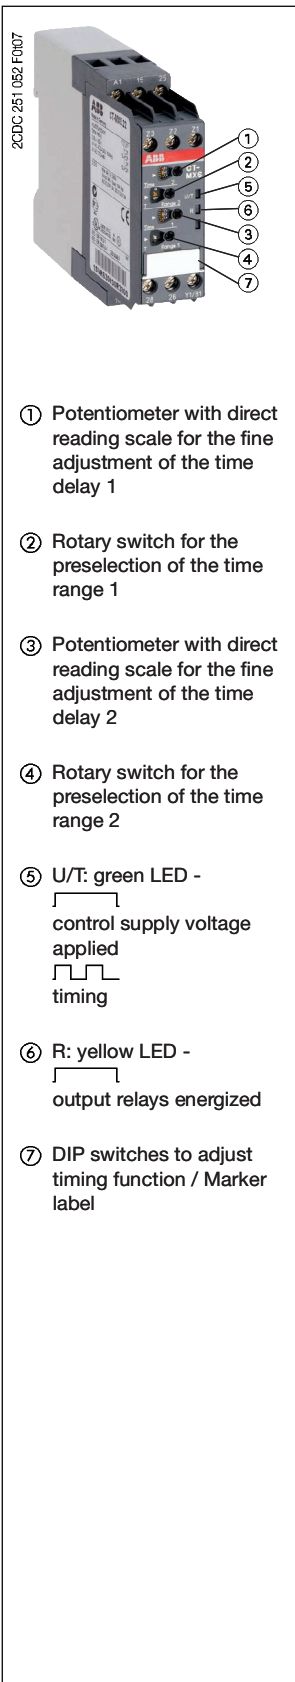

#### Features

- Rated control supply voltage 24-48 V DC, 24-240 V AC
- Multifunction timer with 5 timing functions: Asymmetrical ON- and OFF-delay, Impulse-ON/OFF, Pulse generator starting with ON or OFF, Single pulse generator, ON/OFF-function
- One device includes 2 x 10 time ranges (0.05 s - 300 h)
- 2 c/o contacts
- Control input with voltage-related triggering to start timing
- 2 remote potentiometer connections
- 2 LEDs for status indication
- Width of 22.5 mm
- Sealable transparent cover (optional accessory) for protection against unauthorized changes of time values
- Integrated marker label

#### Approvals

|  |                             |         |
|--|-----------------------------|---------|
|  | UL 508, CAN/CSA C22.2 No.14 |         |
|  | GL                          |         |
|  | GOST                        |         |
|  | CB scheme                   |         |
|  | CCC                         | pending |

#### Marks

|  |        |         |
|--|--------|---------|
|  | CE     |         |
|  | C-Tick | pending |

#### Order data

| Type      | Rated control supply voltage | Time range         | Output         | Control input              | Order code         |
|-----------|------------------------------|--------------------|----------------|----------------------------|--------------------|
| CT-MXS.22 | 24-48 V DC, 24-240 V AC      | 2 x 0.05 s - 300 h | 2 c/o contacts | voltage-related triggering | 1SVR 630 030 R3300 |

#### Order data - Accessories

##### Adapter for screw mounting on panel

| Type   | Width in mm | Order code         |
|--------|-------------|--------------------|
| ADP.01 | 22.5        | 1SVR 430 029 R0100 |

##### Sealable transparent cover

| Type   | Width in mm | Order code         |
|--------|-------------|--------------------|
| COV.01 | 22.5        | 1SVR 430 005 R0100 |

##### Marker label

| Type   | Width in mm | Order code         |
|--------|-------------|--------------------|
| MAR.01 | 22.5        | 1SVR 366 017 R0100 |