



circuit breaker 3VA2 IEC Frame 100 breaking capacity class M $I_{cu}=55 \text{ kA @ } 415 \text{ V}$
 3-pole, line protection ETU330, LIG, $I_n=63 \text{ A}$ overload protection $I_r=25 \text{ A} \dots 63 \text{ A}$
 short-circuit protection $I_i=1.5 \dots 12 \times I_n$ ground-fault protection $I_g=0.25 \dots 1 \times I_n$,
 $t_g=0.1/0.3 \text{ s}$ nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU330
protection function of the overcurrent release	LIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	5.4 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	1.8 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	15 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	10 500
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
• communication function	No
• other measurement function	No
Net Weight	2.091 kg
Current	
operational current	
• at 40 °C	63 A
• at 45 °C	63 A
• at 50 °C	63 A
• at 55 °C	63 A
• at 60 °C	63 A
• at 65 °C	63 A
• at 70 °C	63 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	M
maximum short-circuit current breaking capacity (I_{cu})	
• at 240 V	85 kA

• at 415 V • at 440 V • at 500 V • at 690 V	55 kA 55 kA 36 kA 2 kA
operating short-circuit current breaking capacity (Ics) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	85 kA 55 kA 55 kA 36 kA 2 kA
short-circuit current making capacity (Icm) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	187 kA 121 kA 121 kA 75.5 kA 3 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum	25 A 63 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum	0.5 s 17 s
adjustable response value setting current (Ii) / for I-tripping • minimum • maximum	94 A 756 A
adjustable current response value current / for G-tripping / with standard characteristic • initial value • full-scale value	15 A 63 A
adjustable response value delay time (tg) / for G-tripping / with I0t characteristic • minimum • maximum	0.1 s 0.3 s
adjustable setting current (InN) / for N-tripping • minimum • maximum	0 A 0 A
product function / grounding protection	Yes
Mechanical Design	
product component • undervoltage release • voltage trigger • trip indicator	No No No
height [in]	7.13 in
height	181 mm
width [in]	4.13 in
width	105 mm
depth [in]	3.39 in
depth	86 mm
Connections	
arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	on both sides nut keeper kit
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	13 x 1 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	25 x 8 mm
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	tin

design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	tin
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	Yes
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Environmental footprint	
global warming potential [CO2 eq] / total	61.814 kg
global warming potential [CO2 eq] / during manufacturing	14.6 kg
global warming potential [CO2 eq] / during operation	48.9 kg
global warming potential [CO2 eq] / after end of life	-2.2 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
reference code / according to IEC 81346-2	Q
Approvals / Certificates	
General Product Approval	



[Miscellaneous](#)



[Confirmation](#)

General Product Approval	EMV	Test Certificates		
			Miscellaneous	Special Test Certificate
	EG-Konf.			Type Test Certificates/Test Report


Maritime application	other				
				CCS (China Classification Society)	Miscellaneous


other	Dangerous goods	Environment		
Miscellaneous	Confirmation		Transport Information	Environmental Confirmations

Environment
Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>



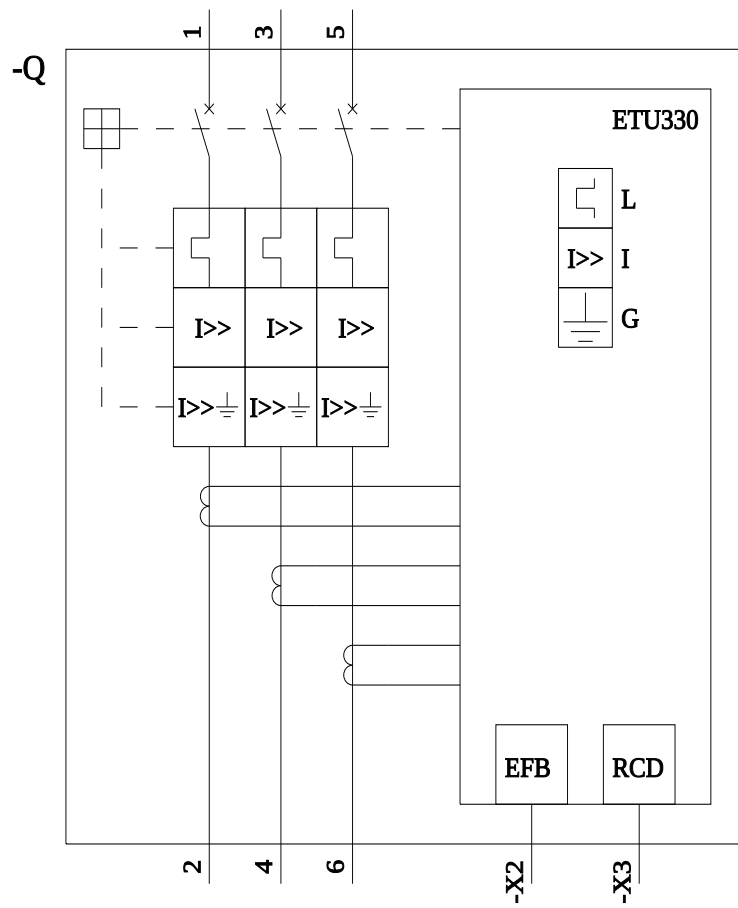

last modified:

4/23/2026

