

Product data sheet

Specifications



Solid state panel mount relay, 25 A,
random switching, thermal pad,
input 18...36 V AC, output 48...530
V AC

SSP3A225B7RT

! Discontinued

! Discontinued on: Jul 13, 2022

Main

Range of product	Harmony Relay
Provided accessory	Thermal interface
Product or component type	Solid state relay
Device short name	SSP
Mounting support	Panel
Number of phases	3 phases
Contacts type and configuration	3 NO
Solid state output type	Random voltage switching

Complementary

test button	Without test button
Minimum switching voltage	18 V AC turn-on
Maximum switching voltage	2 V AC turn-off
Response time	20 ms (turn-on) 30 ms (turn-off)
Input current	15...20 mA
Load current	0.1...25 A
Transient overvoltage	1200 V
Surge current	275 A for 20 ms 300 A for 16.6 ms 85 A for 1 s
Maximum I ² t for fusing	380 A ² .s for 10 ms at 50 Hz 370 A ² .s for 8.3 ms at 60 Hz
Maximum leakage current	3 mA off-state
Maximum voltage drop	<1.35 V on-state
DV/dt	500 V/μs off-state at maximum voltage
Power factor	0.5 (with maximum load)
Motor controller rating	0.75 hp 40 °C 120 V AC 1 hp 40 °C 240 V AC 3 hp 40 °C 480 V AC 4.4 hp 40 °C 530 V AC
Motor power kW	0.56 kW at 40 °C 120 V AC 0.74 kW at 40 °C 240 V AC 2.22 kW at 40 °C 480 V AC 3.24 kW at 40 °C 530 V AC

Insulation resistance	>= 1000 MOhm at 500 V DC
Maximum capacitance	8 pF for input/output
Dielectric strength	4 kV AC for input/output 4 kV AC for input or output to case
Tightening torque	0.9...1.1 N.m for input 1.7...2.2 N.m for output
Connections - terminals	Screw terminals: 1 x 0.2...1 x 2.5 mm ² , (AWG 24...AWG 14) for input Screw terminals: 1 x 1.5...1 x 10 mm ² , (AWG 16...AWG 8) for output
Thermal resistance	0.24 °C/W
LED indicator	LED, green for input
IP degree of protection	IP20
Net weight	0.24 kg
Width	101.3 mm
Height	79.7 mm
Depth	35.4 mm
Device presentation	Complete product

Environment

Flame retardance	V0 conforming to UL 94
Ambient air temperature for operation	-40...80 °C
Ambient air temperature for storage	-40...125 °C
Pollution degree	2
Overvoltage category	III
Product certifications	UL CSA
Marking	CE
Standards	IEC 62314 IEC 61000 IEC 60950-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better



Materials and Substances

SCIP Number

134201bc-d293-4667-9cca-10a7f11729e0

EU RoHS Directive

[Compliant By Exemption](#)

Use Longer



Lifetime extension

Repair

No

Use Again




Repack and remanufacture

End of life manual availability

[End of Life Information](#)

Performance Curves

Derating Curves

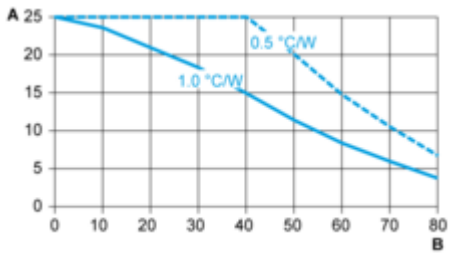

A : Load Current (Amperes)
B : Ambient Temperature (°C)

Technical Illustration

Dimensions

