

Product datasheet

Specifications



Easergy P1F 24-250V 3CT 1lo: 0.01-2IN 0DI-6DO RS485 USB

REL15004

EAN Code: 3606481893543

Main

Range of product	PowerLogic
Product or component type	Protection relay
Relay application	Feeder
product reference	P1
Device mounting	Flush
Mounting support	Fixing kit
Mounting mode	Flush-mounted
power supply	24...240 V AC 24...250 V DC
measuring inputs	: 1/5 A CT phase current 0
number of Digital Inputs (DI)	0
number of Digital Outputs (DO)	6 DO 1 watchdog
type of temperature module connection	1 twisted shielded pair
communication ports	1 RS485 on rear 1 USB type mini B on front
communication protocols	CEI 60870-5-103 Modbus RTU
Cybersecurity	Password protection
protection functions	Breaker failure 50BF Phase overcurrent 50/51 Earth fault overcurrent 50N/51N Lockout relay 86 Thermal overload protection 49 Cold load pick-up
Arc flash protection	No
measurement functions	Current 3-phase Current RMS Current peak Frequency Temperature overload
control functions	Local/remote control I/O push-button Using serial port
monitoring functions	Trip circuit supervision 74 Relay self-monitoring
logs and records	Event recording Trip context information
Switchgear diagnosis type	Trip circuit supervision ANSI code: TCS

Connections - terminals	Snap-on fixed
-------------------------	---------------

Complementary

Maximum power consumption in W	13.5 W AC 4 W DC
--------------------------------	---------------------

Software name	ESetup Easergy Pro: device setup
---------------	----------------------------------

Display type	Graphic display terminal
--------------	--------------------------

Number of key	9
---------------	---

Local signalling	6 x LED red/orange programmable 1 x LED red relay trip indicator 1 x LED green watchdog
------------------	-----------------------------------------------------------------------------------------------

Device connection	Serial port 1 shielded twisted pair
-------------------	-------------------------------------

Communication compatibility	IEC 60870-5-103 Modbus RTU
-----------------------------	-------------------------------

Standards	EN 60255-26:2009 EN 60255-1:2010 EN 60255-27:2005
-----------	---------------------------------------------------------

Product certifications	CE
------------------------	----

Height	Embedded: 101.5 mm Total: 116.5 mm
--------	---------------------------------------

Width	Embedded: 101.5 mm Total: 116.5 mm
-------	---------------------------------------

Depth	Embedded : 108 mm Total : 119 mm
-------	-------------------------------------

Net weight	0.8 kg maximum
------------	----------------

Environment

Directives	2006/95/EC - low voltage directive 2004/108/EC - electromagnetic compatibility
------------	-----------------------------------------------------------------------------------

Electromagnetic compatibility	Electromagnetic immunity level 3 conforming to EN 61000-4-2/3/4/5/6/8
-------------------------------	-----------------------------------------------------------------------

Mechanical robustness	Seismic tests: 2 Gn horizontal, 1 Gn vertical conforming to EN 60255-21-3 Shocks (level: class 1) : 5 Gn for 11 ms conforming to EN 60255-21-2 Shocks withstand (level: class 1) : 10 Gn for 16 ms conforming to EN 60255-21-2 Bumps (level: class 1) : 15 Gn for 11 ms conforming to EN 60255-21-2 Vibrations (level: class 1) : 1 Gn, 10...150 Hz, 1 cycle conforming to EN 60255-21-1
-----------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Ambient air temperature for operation	-25...60 °C -30...70 °C (16 h)
---------------------------------------	-------------------------------------

Ambient air temperature for storage	-30...70 °C
-------------------------------------	-------------

IP degree of protection	IP54 conforming to IEC 60529
-------------------------	------------------------------

Relative humidity	0...93 % at 40 °C, 21 days 0...93 % at 60 °C, 10 days 93 % at 25...55 °C, 6 cycles, 12 + 12 hours
-------------------	---------------------------------------------------------------------------------------------------------

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Height	18.500 cm
------------------	-----------

Package 1 Width	16.300 cm
-----------------	-----------

Package 1 Length	16.300 cm
------------------	-----------

Package 1 Weight	1.039 kg
------------------	----------

Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	7.050 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	239 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	79 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.6 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	157 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	1 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	2140e85d-91da-4f06-9dcd-b67f68a55691

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	5
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Image of product / Alternate images


Alternative



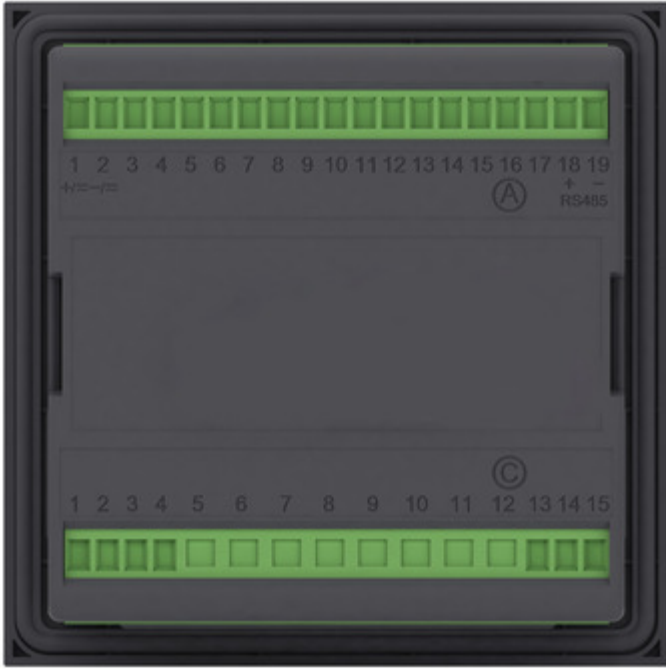


Technical Illustration

Assembly's dimensions

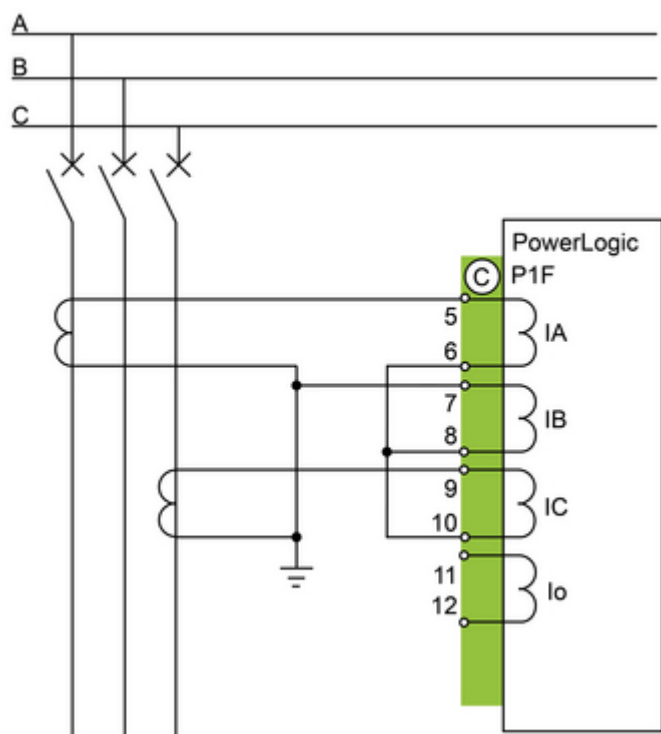


Technical Illustration

Assembly's dimensions

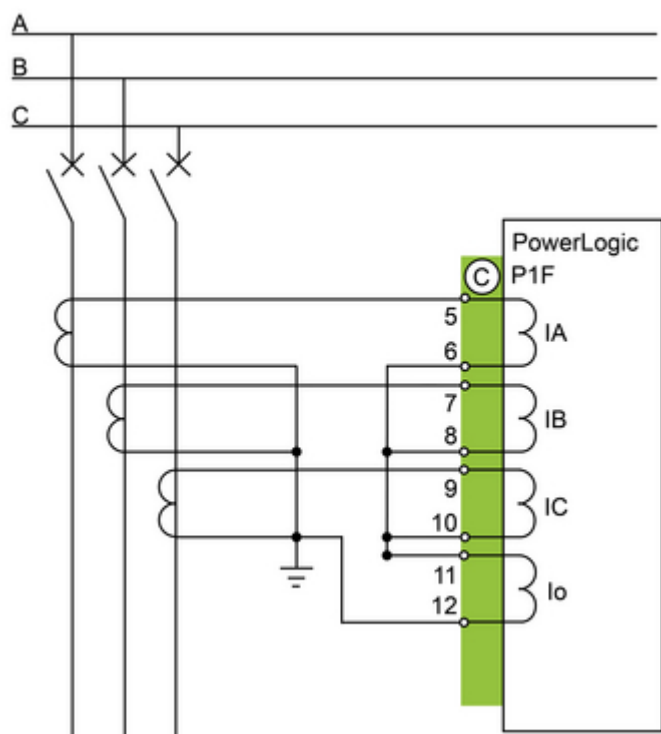


Technical Illustration

Assembly's dimensions

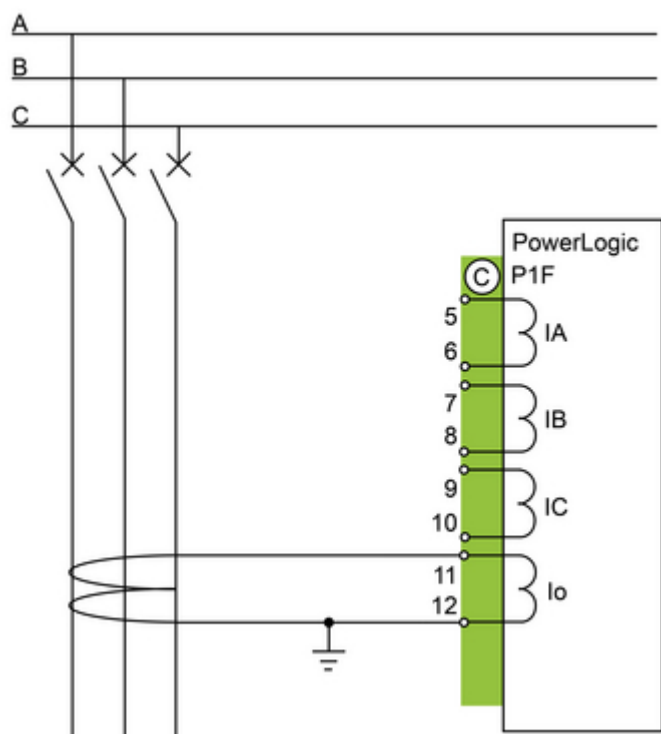


Technical Illustration

Assembly's dimensions

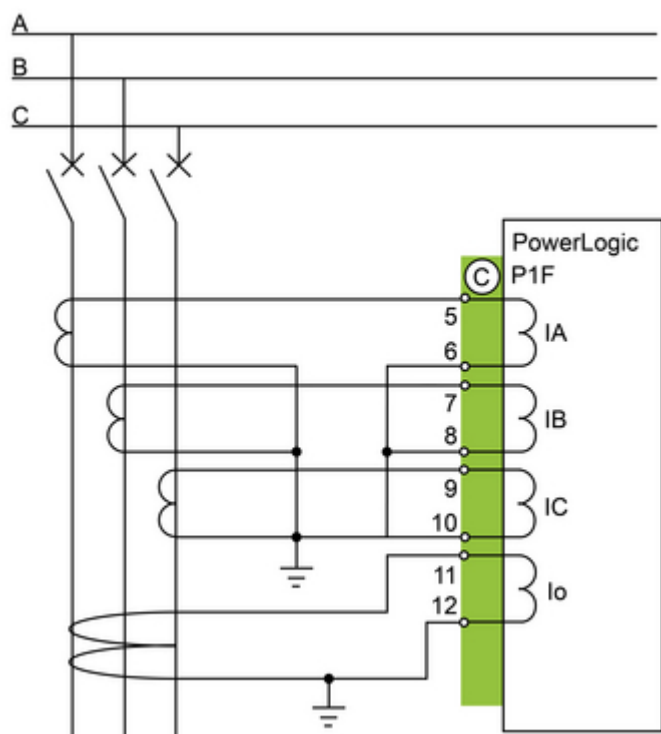


Technical Illustration

Assembly's dimensions

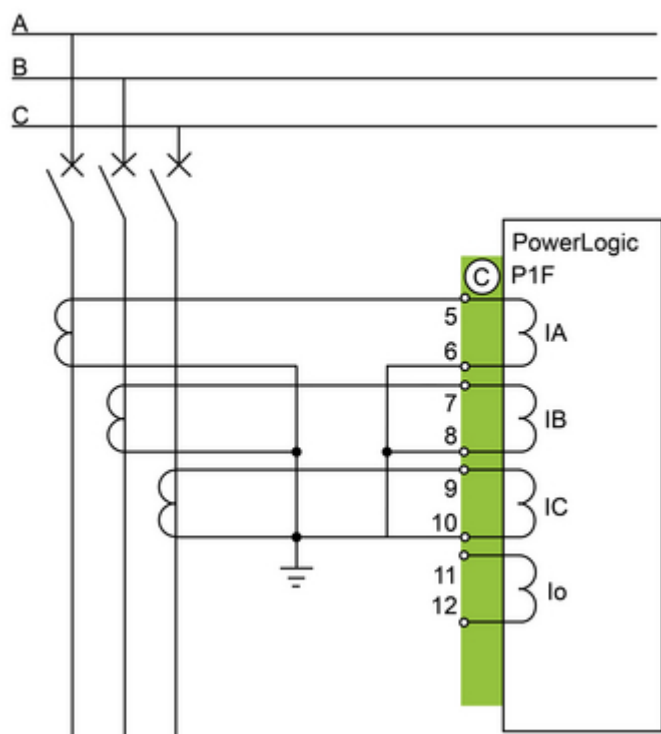

Technical Illustration

Assembly's dimensions

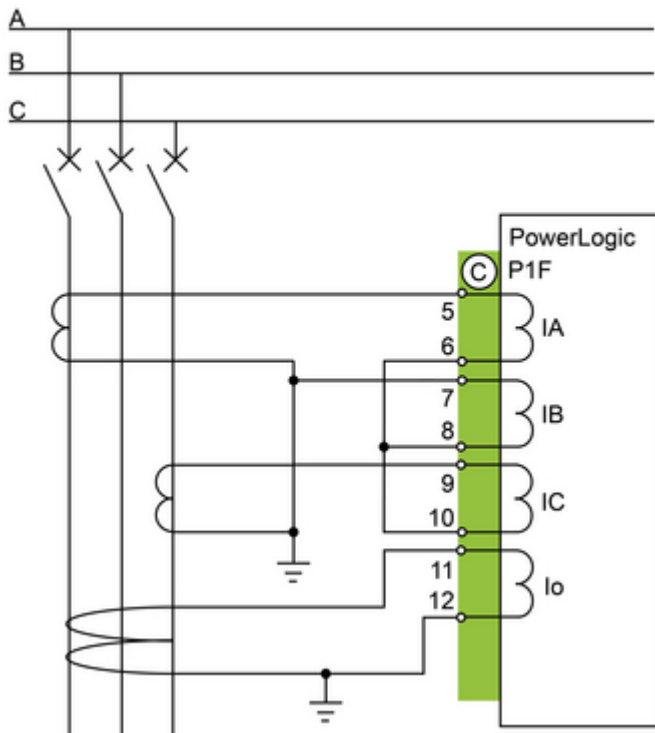

Technical Illustration

Assembly's dimensions

